FORM PTO-1390 REV. 5-93

US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEYS DOCKET NUMBER P01.0401

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

U.S.APPLICATION NO. (if known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO. PCT/EP00/04041

INTERNATIONAL FILING DATE 5 May 2000

10/019853 PRIORITY DATE CLAIMED

7 May 1999

TITLE OF INVENTION

"METHOD AND SYSTEM FOR IMPOSING PRINT DATA"

APPLICANT(S) FOR DO/EO/US

Jacek KOWALSKI and Petra WEGELE

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1 1

6

fü

179

This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.

This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.

This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay. A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.

A copy of International Application as filed (35 U.S.C. 371(c)(2))

a. a is transmitted herewith (required only if not transmitted by the International Bureau).

b. a has been transmitted by the International Bureau.

c. I is not required, as the application was filed in the United States Receiving Office (RO/US)

A translation of the International Application into English (35 U.S.C. 371(c)(2).

7:5⊠ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)) a. are transmitted herewith (required only if not transmitted by the International Bureau).

b. a have been transmitted by the International Bureau.

c. . have not been made; however, the time limit for making such amendments has NOT expired.

d.

have not been made and will not be made.

A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).

8.0 9. 🗆 An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).)

10. ₪ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C.371(c)(5)).

Items 11, to 16, below concern other document(s) or information included:

11. ₪ An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, Prior Art, Search Report).

12. 0 An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. (SEE ATTACHED ENVELOPE)

13 A FIRST preliminary amendment.

A SECOND or SUBSEQUENT preliminary amendment.

14. A substitute specification & marked up version of application.

15. 🗆 A change of power of attorney and/or address letter.

16. ₪

Other items or information: a. Submittal of Drawings

b.

EXPRESS MAIL #EL 843744008US, dated November 7, 2001.

		- 1			591 Pa	CH DOT	A 7 KIAN 2004
U.S.APPLIC	ATION NO (if known.	0701985	PCT	ATIONAL APPLICATION /EP00/04041	IND.	P01,0401	Meek MON SUUT
17. ⊠	The following fe	es are submitted:				CALCULATIONS	PTO USE ONLY
	BASIC NATION Search Report has	ATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5): ort has been prepared by the EPO or JPO					
	International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) \$710.00						
	No international preliminary examination fee pald to USPTO (37 C.F.R. 1.482) but international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)						
	Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2) paid to USPTO						
International preliminary examination fee pald to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$ 100.00						L	r
ENTER APPROPRIATE BASIC FEE AMOUNT =						\$ 890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than \square 20 $\;\square$ 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).						\$	
Claims		Number Filed		Number Extra	Rate		
Total C	laims	13	- 20 =		X \$ 18.00	\$	
Indeper	ndent Claims	4	-1=	11	X \$ 84.00	\$ 84.00	
Multiple Dependent Claims \$280.00 +						\$	
TOTAL OF ABOVE CALCULATIONS =					\$ 974.00		
ार्ड होंदियांon by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed_(Note 37 C.F.R. 1.9, 1.27, 1.28)						\$	
SUBTOTAL =					\$ 974.00		
Processing fee of \$130.00 for furnishing the English translation later than \square 20 \square 30 months from the earliest claimed priority date (37 CFR 1.492(f)).						\$	
ÚĬ.	TOTAL NATIONAL FEE =					\$ 974.00	
		d assignment (37 C.F.R. 1. te cover sheet (37 C.F.R. 3					
TOTAL FEES ENCLOSED =						\$ 974.00	
						Amount to be refunded	\$
						charged	\$
a. 🛮	A check in the a	amount of \$ <u>974.00</u>	to	cover the abov	e fees is enclos	ed.	
b. 🗆	Please charge r	my Deposit Account Nenclosed.	No	in the a	mount of \$	to cover the abo	ve fees. A duplicate of
C. ⊠		ner is hereby authoriz unt No. <u>501519</u> . A d					r credit any overpayme
NOTE: V	Where an appropriat I granted to restore	te time limit under 37 C.F the application to pendir	R. 1.494	or 1.495 has not	been met, a petitio	on to revive (37 C.F.R. 1.1	37(a) or (b)) must be
SEND ALL CORRESPONDENCE TO:							
Schiff Hardin & Waite Patent Department Melvin A. Robinson							
6600 Sears Tower NAME							
Chicag	o, Illinois 60600	6					
		ı		31,870_ legistration Nu			

531 Rec'd PCT/FT. 0 7 NOV 2001

IN THE UNITED STATES ELECTED OFFICE OF THE UNITED STATES PATENT AND TRADEMARK OFFICE UNDER THE PATENT COOPERATION TREATY-CHAPTER II

"PRELIMINARY AMENDMENT"

APPLICANT:

15

20

Jacek KOWALSKI et al.

SERIAL NO.:

EXAMINER:

FILING DATE:

ART UNIT:

INTERNATIONAL APPLICATION NO.: PCT/EP00/04041

INTERNATIONAL FILING DATE: 5 May 2000

INVENTION:

METHOD AND SYSTEM FOR IMPOSING PRINT DATA

Hon. Assistant Commissioner for Patents

Box PCT

Washington D.C. 20231

STR:

Amend the above-identified international application before entry into the national stage before the U.S. Patent & Trademark Office under 35 U.S.C. §371 as follows:

IN THE SPECIFICATION

Enclosed is a Substitute Specification that has been amended to place the International application into form for U.S. prosecution. Also enclosed is a marked up version of the specification showing the changes made to the original application which resulted in the substitute specification.

5

IN THE CLAIMS

Cancel claims 1-13 without prejudice. Add new claims 14-26 as follows: Please add the following:

- 14. A method for signature-by-signature editing of print data, comprising the steps of:
- editing the print data for printing on at least one sheet in a logical page sequence corresponding to at least one signature, said at least one signature forming a section of a printed product and including a plurality of pages;
- defining at least one parameter of a recording medium on which the print data are printed and that is relevant for a position of a print image on the recording medium folded in signatures;
- implementing a position correction of the respective print image on the pages before printing dependent on said at least one parameter; and
- computationally simulating folds of said at least one sheet needed for producing said at least one signature with assistance of a computer program so that the print images of successive pages of the folded signature lie exactly registered above one another, the folds ensue in two directions perpendicular to one another, and said position correction ensues in the two directions perpendicular to one another.
- 15. A method according to claim 14, wherein said step of computationally simulating simulates the folds of the signature for said position correction; and further comprising the step of:
- calculating correction values for the print image of a page from an influence of each fold on a print image of at least one page.
 - 16. A method according to claim 15, wherein said simulating step simulates the

20

5

folds page-by-page with ascending or descending page number, and further comprising the step of:

forming pairs of successive page numbers that due to the signatures at least one of come to lie on one another as a result of a fold and between which a fold is provided due to the signature.

- 17. A method according to claim 16, further comprising the steps of: carrying out a successive check out to see whether a physical fold of the sheet is possible as a result whereof the pages of a page pair of successive pages are arranged in reading sequence after the sheet is folded to form the signature; and implementing a data-oriented fold when a fold is possible and entering the page pair in a list when a physical fold cannot be implemented.
- 18. A method according to claim 17, further comprising the step of: processing page pairs present in the list with priority over other page pairs until a non-foldable page pair in the list is processed.
- 19. A method according to claim 14, wherein said parameter is a thickness of the recording medium.
- 20. A method according to claim 14, further comprising the step of: binding all signatures of the printed recording medium that belong together to form a printed product.
- 21. A printing system, comprising: at least one computer; and

20

5

defining at least one parameter of a recording medium on which the print data are printed and that is relevant for a position of a print image on the recording medium folded in signatures;

implementing a position correction of the respective print image on the pages before printing dependent on said at least one parameter; and

computationally simulating folds of said at least one sheet needed for producing said at least one signature with assistance of a computer program so that the print images of successive pages of the folded signature lie exactly registered above one another, the folds ensue in two directions perpendicular to one another, and said position correction ensues in the two directions perpendicular to one another.

22. A printing system according to claim 21, further comprising:

at least one post-processing device that at least one of cuts and folds and binds a recording medium printed by said printer device to form a printed product.

23. A printing system according to claim 22, wherein binding ensues in signatures.

24. A computer program product for implementing steps of:

editing the print data for printing on at least one sheet in a logical page sequence
corresponding to at least one signature, said at least one signature forming a section
of a printed product and including a plurality of pages;

20

25

implementing a position correction of the respective print image on the pages before printing dependent on said at least one parameter; and

- computationally simulating folds of said at least one sheet needed for producing said at least one signature with assistance of a computer program so that the print images of successive pages of the folded signature lie exactly registered above one another, the folds ensue in two directions perpendicular to one another, and said position correction ensues in the two directions perpendicular to one another.
- 25. A computer program product according to claim 24, further comprising: at least one of a data carrier and a datafile and a computer program module and a command sequence and a signal sequence.
- 26. A computer on which a computer program product is loaded to perform the steps of:
- editing the print data for printing on at least one sheet in a logical page sequence corresponding to at least one signature, said at least one signature forming a section of a printed product and including a plurality of pages;
- defining at least one parameter of a recording medium on which the print data are printed and that is relevant for a position of a print image on the recording medium folded in signatures;
- implementing a position correction of the respective print image on the pages before printing dependent on said at least one parameter; and
- computationally simulating folds of said at least one sheet needed for producing said at least one signature with assistance of a computer program so that the print images of

successive pages of the folded signature lie exactly registered above one another, the folds ensue in two directions perpendicular to one another, and said position correction ensues in the two directions perpendicular to one another.

IN THE ABSTRACT

Please add the abstract in the following separate page.

Abstract of the Disclosure

A method, system and computer program provides for making an image area correction in a printing system. Print data is provided in a logical page order corresponding to at least one signature for printing. At least one parameter of a recording medium on which the print data are printed is determined, this parameter being relevant to the position of the printing format on the recording medium, which is folded according to the signature. The position of the pages is then corrected according to this parameter prior to printing, in such a way that the print formats of successive pages of the finished signature are positioned accurately.

REMARKS

The foregoing amendments to the specification and claims under Article 41 of the Patent Cooperation Treaty place the application into a form for prosecution before the U.S. Patent and Trademark Office under 35 U.S.C. §371. Accordingly, entry of these amendments before examination on the merits is hereby requested.

Respectfully submitted,

Melvin A. Robinson (reg. no. 31,870)

Patent Department Schiff Hardin & Waite 6600 Sears Tower

Chicago, Illinois 60606

Telephone: 312-258-5785 **CUSTOMER NO. 26574**

ATTORNEY FOR APPLICANT

531 Rec'd PCT. 0 7 NOV 2001

This redlined draft, generated by CompareRite (TM) - The Instant Redliner, shows the differences between - original document : P:\H&S C DRIVE\MYFILES\1044\PCT\P010401 REVISED TRANS.WPD and revised document: P:\H&S C DRIVE\MYFILES\1044\PCT\P010401 SUB SPEC.WPD

CompareRite found 107 change(s) in the text

Deletions appear as Strikethrough text Additions appear as Bold-Underline text

SPECIFICATION 07 NOV 2001

TITLE

"METHOD FOR THE IMPOSITION OF PRINT DATA" BACKGROUND OF THE INVENTION

Field of the Invention

The present The invention is directed to a method and to a system for the imposition of print data, particularly for processing a digital print data stream.

Description of the Related Art

A special area, what is referred to as "Print on Demand" (PoD) has arisen in the field of digital printing. A corresponding POD system has been described, for example, under the title "Entwicklung neuer Medien-Konzepte für POD-Dienstleister" in the periodical Deutscher Drucker, No. 35/98 of 17 September 1998.

Compared to conventional offset book printing, the advantages of such POD systems are that printed matter can be produced in a short time (just-in-time). Small editions of about 2 through 2000 copies can thus be economically published. A specific, currently required number of books can thus be printed in a short time on demand. Costs for warehousing as well as for remainders of books can thus be eliminated.

On the other hand, there is the necessity in POD systems of likewise designing the layout of the printout in high-performance fashion, particularly the imposition of the print data. Whereas a relatively great deal of time is available for these procedures in conventional book printing, this procedure must be accomplished in a relatively short time in POD systems in order to be able to achieve the aforementioned advantages of a just-in-time production. This requirement is countered, on the one hand, by the fact that there are numerous

setting possibilities and demands during the course of a print production of books or bound brochures. In a POD printing system, a post-processing system following the printer device is usually connected, this compiling the material printed by the printing system to form a printed document such as a book or a brochure. For example, a saddle binder or a spiral binder can <u>be provided</u> following the printer device; <u>so</u> that the printed pages being are bound therewith to form a book or a brochure.

Further, a folding device can be provided between the printer device that prints the recording medium and the binding system when the POD printing system generates printed matter in signatures. The fundamentals and various specific versions of folding techniques and signatures are described, for example, in the brochure "Folding Techniques" issued by Stahl GmbH, a subsidiary of Heidelberger Druckmaschinen AG, 69115 Heidelberg, Order No. 1-800-437-7388 (Heidelberger). The content of this document is herewith incorporated by reference into the present specification. Various signature strategies and imposition patterns connected therewith are described in this document for sheet-fed printing systems and web-fed printing systems.

As already mentioned above, there is the demand in POD systems to implement the print data and, thus, the imposition event as well as <u>in as</u> high-performance <u>a manner</u> as possible, i.e. fast and largely automated.

Accordingly, there is also the demand to design imposition patterns, i.e. the arrangement of the page sequence on the recording medium or, respectively, signature <u>in</u> as fully automated <u>a manner</u> as possible such that both the page sequence as well as the position of the print image on the pages of the ultimately produced printed matter (book, brochure or the like) exactly corresponds to the

reading sequence. A further demand is to thereby achieve a specific registration precision of successive pages in the printed matter. This demand is opposed by the shift of the print image in signature printing caused by folding the signature and cutting the edges.

US -A-Patent 4,672,462 discloses a method and a system for recording a plurality of images on a light-sensitive film, whereby the images correspond to several pages of conventional book bindings. The layout of the print images is adapted to the binding before the exposure in conformity with the prescriptions of an operator.

European Patent reference EP-A-741 877 B1 or, respectively, International Published Application WO-A-95/20185 corresponding thereto discloses a printing system wherein various post-processing systems for processing the page stream printed on the paper through a device for binding documents are connected to a printer device.

<u>European Patent reference</u> EP-A-0 608 685 [...] <u>discloses</u> a device for producing brochures from images that have been read in. For generating printed pages according to prescriptions, the images are automatically turned and adapted in terms of their dimensions.

US -A-Patent No. 5,398, 289 discloses a method and a system for printing signatures. Upon output of individual sheets having up to four print pages, a position of the print images in the printing that is not exactly registered is corrected, this position having arisen as a result of a folding of the signature at the back margin. However, US -A-Patent No. 5,398,289 discloses no possibility for

correcting the print image shift on sheets caused by folding, said sheets having a plurality of fold axes for producing signatures.

SUMMARY OF THE INVENTION

An object of the <u>present</u> invention is to assure the registration precision of printed pages in printed matter produced with signatures even given a plurality of folds of the sheet, whereby rejects are to be avoided.

This object is achieved by the invention described in the independent claims. Advantageous developments of the invention are the subject matter of the subclaims: a method for signature-by-signature editing of print data in which the print data are edited for printing on at least one sheet in a logical page sequence corresponding to at least one signature, the signature forming a section of the printed product and containing a plurality of pages; at least one parameter of the recording medium on which the print data are printed and that is relevant for the position of the print image on the recording medium being folded in signatures is defined;

and a position correction of the respective print image on the pages is implemented before the printing step dependent on the parameter, whereby the folds of the sheet needed for producing the signature are computationally simulated with the assistance of a computer program so that the print images of successive pages of the folded signature lie exactly registered above one another, the folds ensuing in two directions perpendicular to one another, and the correction ensuing in the two directions perpendicular to one another.

In a preferred method, the folds of the signature are computer-simulated for the position correction and the correction values for the print image of a page are calculated from the influence of each fold on the print image of at least this page. Specifically, the folds are simulated page-by-page with ascending or descending page numbers, whereby pairs of successive page numbers are respectively formed that, due to the signatures, come to lie on one another as a result of a fold and/or between which a fold is provided due to the signature. A successive check is carried out to see whether a physical fold of the sheet is possible as a result whereof the pages of a page pair of successive pages are arranged in reading sequence after the sheet is folded to form the signature, whereby, when a fold is possible, a data-oriented fold is implemented and the page pair is entered in a list when a physical fold cannot be implemented. In one embodiment, the page pairs present in the list are processed with priority over the other page pairs until a non-foldable page pair in the list is processed.

The thickness of the recording medium may be acquired as parameter.

Further, all signatures of the printed recording medium that belong together are bound to form a print product.

The present invention also provides a printing system including at least one computer and a printer device for the implementation of a method according to the preceding. In the printing system, at least one post-processing device that cuts, folds and/or binds a recording medium printed by the printer device is provided to form a print product. A particular embodiment provides that the binding ensues in signatures.

Additionally, the present invention provides a computer program product for the implementation of method as set forth above. The computer program product has a data carrier, a datafile, a computer program module or a command sequence and/or a signal sequence. A computer on which a computer program product according to the foregoing is loaded is also provided..

According to a first aspect of the invention, print data are edited in a logical page sequence corresponding to one or more signatures. The editing can ensue with a production process for printed matter (work flow), for example in a host computer, in a computer ((a print server) preceding a printer device or on some other workstation as well ((a client computer)). In particular, the editing ensues as an imposition pattern in a production control program.

Further, it is inventively provided to implement a position correction of the imposed pages such that the print images of successive pages lie exactly registered relative to one another in the folded signature, i.e. in the finished printer matter. Tiss This position correction is also referred to below as <u>a</u> type area correction.

The <u>present</u> invention is based on the perception that the folding of printed sheets for producing signatures can be simulated on a computer. In the invention, the folding of the sheet is computer-simulated, particularly on the basis of the distribution of the printed pages on the sheet, i.e. on the basis of the signature pattern. The shift of the page positions within the printed matter that occurs due to the multiple folding of the sheet is compensated on the basis of a parameter of the recording medium, for example its thickness or its weight. Although there are a number of sequence variations for the individual folds to be implemented for a

printed sheet, each of these variations must ultimately lead to the same folded result since the reading sequence from the first page to the last page within the finished printed matter must always be the same independently of the folding sequence.

It was also inventively recognized that the physical folding of a sheet can be computer-simulated, and that an automated correction of the fold-induced shift or, respectively, of a registration imprecision of successive printed pages can be implemented <u>under</u> computer <u>-controlled control</u> in the finished printed matter.

The invention achieves the advantage that the registration precision of successive printed pages is automatically produced without having to carry out investigations or calculations at the user side. The automatic correction thus ensues dependent on the indicated imposition strategy that defines the distribution of the printed pages on the sheet as well as dependent on a further parameter dependent on the nature of the recording medium such as the specific weight, diameter and/or material thereof.

Due to the largely automatic correction, the indicated solution is extremely user-friendly and leads to what is a faster overall production of printed matter.

An algorithm that calculates the correct folding of the printed sheet and simulates the shifts of the printed page caused as a result thereof particularly works on a page-by-page basis, whereby respective pairs of successive page numbers are formed that must be folded onto one another conditioned by the signature or, respectively, conditioned by the imposition strategy. In particular, the work sequence of the algorithm is thereby <u>performed</u> page-by-page in <u>a</u> ascending or <u>a</u> descending page sequence. A check is thereby initially carried out to see whether a fold between the two pairs is possible on the basis of the folds that ensued

previously; potentially, the folding is simulated and the correction values for a position correction that result therefrom are calculated.

One advantage of the inventive method, wherein the position correction is calculated page-individually for each page of each signature, is that the method can also implement an automatic position correction for unusual signature patterns produced by the operator himself. Likewise, page correction values can be stored for standard signatures as well as for standard recording media and can be directly called as warranted.

Further details of inventive, preferred correction methods or, respectively, calculation algorithms are explained in greater detail below on the basis of the Figure description.

A second aspect of the invention is directed to the executive work sequence (work flow) in the production of printed matter. It is provided during the course of the imposition of printed pages to initially subject a print data stream (for example, PCL or PostScript) to a raster process and to then further-process the rastered data page-by-page. It is initially provided during the course of this further-processing to merge information page-by-page, to overlay or crop the pages or to combine variable data with static data in the pages. The imposition of the print data ensues in the processing step following thereupon, whereby -- optionally -- standard signatures can be selected or individual signatures can be produced. Finally, printer-specific settings ensue, for instance the selection of input trays of the printer device as well as of the print region to be printed out.

Further advantages and details of the invention are explained in greater detail on the basis of the Figures. Shown therein are: BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 Further advantages and details of the invention are explained in greater detail on the basis of the Figures.

Figure 1 is a functional block diagram showing system components of a POD printing system;

Figure 2 shows a dialog box as displayed on a display screen with a selection menu in which the executive work sequence of an expanded imposition event becomes clear;

Figure 3 a shows a dialog box or selection window for mixing data;

Figure 4 a shows a dialog box or selection window for cropping images;

Figure 5 a-shows a dialog box or selection window for the overlay of print datafiles;

Figure 6 <u>a shows a dialog box or</u> selection window for linking variable data into a print data stream;

Figure 7 a shows a dialog box or selection window for defining an imposition strategy;

Figure 8 a signature shows a dialog box or selection window for selecting a signature;

Figure 9 ais a dialog box or selection window for positioning the pages on the printed sheet;

Figure 10 a-is a dialog box or selection window for the type area correction;

Figure 11 a-is a dialog box or selection window for the insertion of blank printed sheets;

Figure 12 a is a dialog box or selection window for defining marks;

Figure 13 a-is a dialog box or selection window for defining input trays of job offset; a job offset;

Figure 14 Figures 14a and 14b are front and back pages, respectively, of a signature pattern and Figure 14c is a perspective view of the folded signature;;

Figure 15 Figure 15 is a step-by-step illustration showing an example for folding a signature;

Figure 16 shows the print image of a page sequence that has had type area correction:

Figure 17 Figures 17a and 17b show an imposition strategy;

Figure 18 Figures 18a and 18b show a flowchart directed to the type area correction; and

Figure 19 is a work sequence diagram.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows a PoD printing system 1. It comprises a data source 2, for example a host computer, at which the print datafiles are output for printing via a network 9 (LAN, WAN) in a specific print data format, for example in PCL, PostScript or the like. These datafiles are conducted as needed to a raster image processor (RIP) 3 that converts the data of the datafiles into a pixel-based format such as, for example, TIFF or IOCA page-by-page. The page data that are generated in this

fashion, for example in the IOCA format, are then supplied to the print server 4. The page data are edited job-specifically in the print server 4. In particular, the processing steps of an integration or, respectively, merging of data, the imposition as well as further processing of the imposed data thereby ensue. Data that were already rastered earlier and that are stored in the host computer 2 or in the print server 4 can also be directly employed in the integration. Another rastering process in the RIP processor 3 is then no longer necessary. Moreover, the RIP processor 3 can also be integrated in the host computer 2 or in the print server 4.

After the merging, imposition and fine processing of the imposed data, these

are sent from the print server 4 to a printer device 5 and are printed therein onto a recording medium, for example onto a paper web. Any type of printer device can be fundamentally employed as <u>the printer</u> device 5. For example, offset printing presses or printer devices that are based on other recording principles such as, for example, an electrophotographic principle are suitable. For example, electrophotographic printers are recited in <u>Published International Patent Applications</u> WO 99/09459 A1 and WO 98/27466 A1. The content of these two publications is herewith incorporated by reference into the present specification. The data as well as the connected printer devices can be provided both for monochromatic as well as for polychromatic printing.

Given the electrophotographic printer device 5 shown in Figure 1, the printed paper web 6 is supplied to a paper post-processing device 7. Thereat, the paper web 6 is cut, folded and ultimately bound to form a finished printed product, for example a book or a brochure. Even though this post-processing device 7 is shown here as a unit, it can be composed of a plurality of discrete devices, for example of a

cutter device, a separate folding device and a separate binding device. The devices of the PoD printing system 1 are connected to one another in control-oriented terms by a common control line 8. A master device, for example the print server 4, controls the production sequence.

The host computer 2 is connected to various user computers 10 (clients) via the network 9. The clients 10 can send print orders to the PoD printing system 1. Various system settings are undertaken in conjunction with the print orders. These system settings can ensue either in the client 10, in the host 2 or, preferably, in the print server 4. The work sequence for undertaking the settings with respect to the imposition of PoD print data is explained in greater detail on the basis of Figures 2 through 18.

Figure 2 illustrates the method sequence (work flow) in the form of a dialog box for display for producing a PoD-suited print data stream for the printer device 5.

The work sequence is first configured and then controlled by a computer program (software). The main window 12 of the running program shown in Figure 2 is the entry menu of the running computer program for setting the system parameters, i.e. for configuring the imposition job. It comprises three workflow symbol fields 13, 14; and 15. Work sequences that mix, overlay or blank out individual data are defined in the first symbol field 13. Before the actual imposition (impose)(the impose step), the work sequence corresponding to the symbol field 13 implements manipulations on the logical page level in the later processing of the print files. Parameters that define the imposition of the edited print datafile, i.e. the build-up of new physical pages from respectively one or more logical pages as well

as the re-sorting of the pages, are determined in the second symbol field 14, "impose".

The possibility of processing the data stream resulting from "integrate" and "impose" on the physical page level exists with the third symbol field 15, "assemble". For example, the page layout can be post-processed therewith in that the positioning of the logical pages or images is modified, blank sheets are inserted or marks are placed on the sheets.

Each of the three symbol fields contains a plurality of command buttons that respectively open new windows for a more detailed definition of corresponding parameters.

Figure 3 shows the window that opens upon actuation of the command button 16, "merge", in the symbol field 15 (integrate).

This window is composed of three areas. The type of insertion, its position and the pages of the print data stream to be processed are indicated in the first area, <u>identified as</u> "settings". What source is to brought into communication with the data stream is indicated in the second window, <u>identified as</u> "selection". A list of the pages and parameters selected in this way can be seen in the third field. The modification of documents thereby ensues on the basis of the individual pages.

The flexibility of the overall system not only allows the joining of specific document pages but also allows other datafiles to be mixed (overlaid) into the print data stream to be printed out. The corresponding settings are undertaken in the window shown in Figure 5. An overlay datafile can thereby be selected, as can the corresponding pages of the document to be printed out and wherein this overlay is to be overlaid.

As a result of such a mixing, both the original page as well as the page (information) determined by the overlay can be seen in the ultimate printed product.

Images of the print data stream can be cropped, i.e. specific areas in the pages of the print data stream can be cut out, via the control button, entitled "cropping", or, respectively, via the selection window shown in Figure 4. Variable data, i.e. data from an external datafile (for example, an address datafile), can be selectively linked into the print datafile in such cropped areas or into areas of the print datafiles that are already empty per se. The corresponding settings are undertaken by the window shown in Figure 6. For example, this functionality allows a personalized printing of printed matter in that, for example, an individual, personal dedication is printed on the first page of the printed matter, for example of each book.

The mask shown in Figure 7 is opened with the command button, "impose". Typical imposition parameters can be set in this window, for instance N-up (one-up, two-up, two-up with identical copies, etc.) and layout (tumble, work-and-turn, etc.). Further, various predefined standard imposition patterns can be selected and called. To that end, the format of the recording medium (A4, letter, etc.) in the printer is also selected or, respectively, indicated. When the option "identical copies" in the area "N-up" was selected, the size and the position of the copied fields can be set via the area 17 ("define objects..."). These printing parameters within a page can be optimized as a result thereof, for example when printing calling cards.

The signature division is defined via the command button, "signatures". This ensues in the window shown in Figure 8. The division of the total number of pages into sections (signatures) ensues via the register card, "sections". 20 sections are

provided in the illustrated example, whereby the sections 17-20 each respectively comprise 24 pages. The smallest section (number 12) comprises only 12 pages. It is thus possible to freely select the respective scope of the sections with this functionality. On the one hand, this makes it possible to optimize the sections, i.e. the signatures, to the effect that as few blank pages as possible are produced. On the other hand, smaller signatures — which are less stable than larger signatures in the bound condition — can be centrally placed in the printed matter, so that the overall work has maximum stability in the bound condition. The signature marks that are required for the later processing steps (folding, (such as folding and binding) can be defined with the second register card. "mark".

The input file (data stream) is divided according to the set signatures in the workflow. Large printed sheets that must be multiply folded in order to then form a chapter of the ultimate printed matter (book; for instance book or periodicals) thereby arise corresponding to the signatures. It is standard that 4 through 96 logical pages be supported for the signatures, i.e. usually multiples of four logical pages, whereby there can also be a departure from both said rules in exceptional cases.

The window shown in Figure 9 is activated with the command button, "positioning", in the symbol field, "assemble. By way of exception, a sheet is referred to as "page" in this window. That the images of a page imposed on a sheet are to be printed centered can be optionally selected in this window. With this option, thus, it is possible to print the images, i.e. a printed paged, web-centered on a web-shaped recording medium, for example on paper. This option is particularly

useful when the recording medium format specified in the print job does not exactly coincide with the format of the physical recording medium.

Figure 10 shows the input window with which the parameters for the initially described type area correction are defined given folded paper webs. Parameters about the nature of the folding are queried in the query field 20. The version, "standard folding" is selected when sheets are only folded around a single edge. This, for example, is the case when a paper web is printed, the paper web is cut into individual sheets, the individual sheets are placed on top of one another and, finally, all sheets are folded over a common edge and stitched together. A type of processing with the same result would be that individual sheets (cut sheets) having a smaller format such as, for example, DIN A4 or DIN A3 are printed, are then likewise placed on top of one another and, finally, folded over the common middle edge and stitched. The option, "inside" or "outside", defines whether the original page positioning on the inner sheet of the signature or on the outer sheet of the signature is preserved. This function is described in greater detail later in Figure 14 Figures 14a. 14b and 14c.

Whereas the version, "standard folding", is only selected for sheets that are folded over a single edge, the version, "signature folding", is selected when folding is carried out over two axes residing perpendicularly on one another. This version will be discussed in detail later on the basis of Figure 15.

The specific weight of the paper (for example, 70 g/m²) is input with the query field 21, "paper weight". Inventively, a correction quantity with reference whereto the individual offset of the print image on the page or, respectively, the quantities required for the type area correction are calculated is determined from this

parameter. Details about this calculation are described in greater detail in conjunction with Figures 44 14a through 17.

In addition to or instead of the paper weight, further parameters of recording media, for example the type of material (paper, film, cloth), the thickness of the recording material or the like, can be indicated in the window, "define creep", in an alternative exemplary embodiment. It can also be provided to allocate these particulars to a specific signature (for example, signature No.12 in Figure 8) and/or to undertake a corresponding allocation to one of several connected printer devices.

The input window for "blank sheets" shown in Figure 11 allows inputs with which blank sheets can be inserted at specific positions before or after printed sheets. In ongoing printing operations, this can particularly ensue with an arrangement that is disclosed by European Patent Document EP 741 877 B1 or, respectively, in Published International Patent Application WO-A-95/20185 corresponding thereto. An external charging (EB) with which, for example, colored or separating sheets pre-printed elsewhere can be inserted into the sheet stream printed by the PoD printer device before the different sheets of a document are joined and bound to form the document is also provided with the buffer memory shown thereat in Figure 1. The content of this earlier publication (EP '877) is incorporated by reference into the present specification.

The input window for "blank sheets" shown in Figure 11 allows inputs with which blank sheets can be inserted at specific positions before or after printed sheets. In ongoing printing operations, this can particularly ensue with an arrangement that is disclosed by EP 741 877 B1 or, respectively, in WO-A-95/20185

corresponding thereto European Patent Document EP 741 877 B1. An external charging (EB) with which, for example, colored or separating sheets pre-printed elsewhere can be inserted into the sheet stream printed by the PoD printer device before the different sheets of a document are joined and bound to form the document is also provided with the buffer memory shown thereat in Figure 1. The content of this earlier publication (EP '877) is incorporated by reference into the present specification.

Marks, for example cut marks, end-of-job marks or other, user-specific marks, can be applied to specific pages of the imposed print data with the input window indicated in Figure 12.

Paper input trays can be selected and a job offset function can be activated sheet-by-sheet with the input window shown in Figure 13. These selection functions are particularly relevant given output with single-sheet printer devices. The job offset function makes it possible to sort the individual sheets (signatures) by signatures or, respectively, jobs and to thus potentially support a compile function that <u>is</u> implemented manually or by machine.

The command button, "print range", shown in Figure 2 makes it possible to define a print range and to print only a sub-region of the datafile as an alternative to a complete print datafile. This is especially advantageous for a proof. As a result thereof, critical sub-regions can be tested, for example the print out of individualized regions of the print job or the overlay of various pages.

Figure 14 shows Figures 14a and 14b show both sides of a printed paper web on which, printed double-sided, a "two up" pattern is printed. The front side 6a of the paper web carries the page numbers 1, 4, 5, 8, 9, 12, 13 and 16, and the back

side 6b of the paper web carries the page numbers 2, 3, 6, 7, 10, 11, 14 and 15. When it is assumed that a signature 25 <u>as shown in Figure 14c</u> is formed from these 16 pages in that the paper web is respectively cut to sheets at the cut edges 16, successive sheets are placed on top of one another and, finally, are folded around the common center fold 27, then the following condition must be met so that pages following one another lie on top of one another with exact registration, i.e. a registration correction is implemented given standard folding.

The logical printed pages with the numbers 1, 2, 15 and 16 of the outer sheet 28 of the signature 25 must be placed farthest outside on the paper web, whereas the logical pages -- the farther the sheets lie inside in the folded signature 25 -- must be positioned farther in toward the middle fold 27. The following thus applies mathematically:

a > b.

whereby 'a' references the distance of the print image of the pages of the outer sheet from the center fold <u>27</u> and 'b' references the distance of the print image of the pages of the inner sheet 29 from the center fold <u>27</u>.

One effect of this type area correction ((also referred to as a creep function) is that the outer edge 31 of the print image 24 increases [sic] is at an increased spacing from the lateral edge 30 of the paper web 6 from the outer sheet to the inner sheet. The shift of the print images thus ensues in the direction of the line [sic] arrow 32 indicated in Figure 14 Figures 14a, 14b and 14c. The parameters "inside" or, respectively, "outside" in the query field 20 (Figure 10) determine whether the original page positioning is to be preserved on the inner sheet 29 or on the outer sheet 28 of the signature 25. When the user decides in favor of the "inside" option.

then the logical pages — proceeding from the inner sheet 29 — migrate farther toward the outside opposite the arrow direction 32. When the "outside" option is selected, then the original position of the print image 24 on the outer sheet 28 is preserved, and the print images on all other sheets are shifted inward in the arrow direction 32 toward the center fold 27.

For calculating the sheet-by-sheet print image offset, conclusions about the paper thickness are drawn from the parameters ((for example, specific paper weight) indicated in Figure 10, a step width is calculated for the print image shift per sheet, and an individual correction shift value is defined for each page of the sheet.

The following algorithm (algorithm 1) is applied for this purpose:

```
if (inside)
    pweights_init = 0 - weight * sheet_ges - 1
else
    pweights_init = 0
```

correction shift value = (pweights_init + weight * (lage - 1)) / a * lunits * (dpi / STD_MPI),

whereby the following apply:

a = an empirically determined parameter for a specific paper grade; for example, a factor a = 500 has proven beneficial for a standard paper with a specific weight of 80 g/m²,

sheets_ges = plurality of sheets
weight = paper weight in grams/m² (for example, weight = 80)
(if "inside" => negative operational sign, i.e.: -80)

lage = page position in the sheet, calculated according to algorithm 2 lunits = 1 unit/pel dpi = current resolution, for example 600 pel/inch STD MPI = 25.4 mm/inch.

Instead of specifying the specific weight and the correspondingly stored value of the quantity 'a', the paper thickness <u>value</u> can be deposited in a table. A corresponding shift value is then determined for each sheet and the logical pages situated on the sheet. Instead of calculating the shift value, it is also possible to select or, respectively, input the shift value from the user. The sheet number or, respectively, the position of the page in the folded sheet is determined dependent on the page number. In the case of "standard folding", all sheets are folded around the center fold (27). The determination of the parameter "lage" then ensues according to the following algorithm (algorithm 2):

```
(page_nr <= pages_ges/2 and page_nr even-numbered)

then → lage = page_nr/2

else if

(page_nr <= pages_ges/2 and page_nr odd-numbered)

then → lage = (page_nr + 1)/2

else if

(page_nr > pages_ges and page_nr even-numbered)

then → lage = (2 * pages_ges/2 - page_nr + 2) / 2

else if
```

(page nr > pages_ges and page nr odd-numbered)

then
$$\rightarrow$$
 lage = $(2 * pages ges/2 - page nr + 1) / 2,$

whereby the following apply:

(page_nr) = page number, and

(pages ges) = total number of pages.

The position determined in this way is the multiplier in algorithm 1 for the correction shift value of the corresponding page.

Example for the calculation of the correction shift according to the two algorithms that have been described:

Standard folding: "inside"

Paper weight (g/m²): 80

Signature and page distribution as in Figure 14 Figures 14a, 14b and 14c

→ weight = -80

→ sheets_ges = 4

→ pweights_init = 0 - (-80 * (4 - 1)) = 240

→ correction shift = (240-80 * (lage -1)) / 500 * 600/25.4

lage = 1: correction shift value = 0.48 mm (11 lunits)

lage = 2: correction shift value = 0.32 mm (8 lunits)

lage = 3: correction shift value = 0.16 mm (4 lunits)

lage = 4: correction shift value = 0.00 mm (0 lunits)

Figure 15 shown an imposition pattern 35 for a signature printing wherein folds ensue in folding axes that are perpendicular to one another. The imposition pattern 35 comprises 32 logical pages, whereby the numbers of the pages that are printed on the front side of the paper web 6 are referenced without parentheses, and the number of the pages that are printed on the back side of the paper web are provided with parentheses. Page 1, thus, is printed on the front side, whereas page 2 is printed on the back side.

The signature or, respectively, the sheet allocated to this signature comprises 32 pages. The folding event ensues in a plurality of steps, whereby the result of the folding due to the reading sequence of the finished printed matter (page sequence 1, 2, 3, ...32) is already fixed in advance. It follows therefrom that the folding event is an event that can be unambiguously described. Given the example shown in Figure 15, the event can be subdivided into three sub-steps.

A zig-zag folding at the three fold edges 41, 42 and 43 ensues in the first sub-step. This procedure leads to the folded sheet 35. When this sheet 36 is folded over the folding axis 44, then the folded sheet 37 arises in the second sub-step. This is folded around the center fold axis 45 in the third sub-step and cut at the remaining axes, the signature 38 arising as a result thereof.

The folding events that have just been described can be described in the following way, logically abstracted:

In an n-dimensional space, let the logical page numbers be arranged corresponding to their positions on the recording medium and to the folded condition of the latter. When, for example, all pages of the paper web given a two-up printing are situated in a plane (level) corresponding to the situation during printing, then the space is four-dimensional corresponding to the front side or, respectively, the back side of the recording medium and a respective row and a column. The dimension is increased at least in regions with specific folding operations. For example, the dimension is doubled by a folding for all those positions that are folded onto one another.

It can be seen with reference to the example of Figure 15 that the space multiplies to a dimension 16 with the first sub-step, i.e. with the zig-zag fold. In the diagram 50, the logical page arrangement is correspondingly indicated with four levels E1, E2, E3 and E4 each having two pages (front side and back side), one respective row and one respective column. After the folding around the center axis 44, the level structure 51 then derives that has exactly twice the number of levels as the level structure 50, namely 8 levels each having two pages. Accordingly, the space to be described is 32-dimensional.

Such a logical level structure can be imaged without further ado in data-oriented terms by corresponding tables or variables with addresses (pointers). Accordingly, the physical folding of sheets can be simulated without further ado in data-oriented terms

As shown in Figure 16, a fold-conditioned position shift of the printed pages within a signature can be replicated from the simulated folds and from the knowledge of the paper web thickness and, thus, can also be corrected. This position correction then ensues not only along one axis as in Figure 14

Figures 14a, 14b and 14c but also along a second fold axis that is perpendicular to the first axis. Whereas -- as was already the case in Figure 14 14a -- the print image shifts ensues [sic] along the arrows arrow direction 32 corresponding to the folding relative to the center fold axis 45, additional print image shifts along arrow 34 and corresponding to the signature folding around the fold axis 44 that are perpendicular thereto are provided given the signature folding shown in Figure 16.

The algorithm with which the distribution of the pages, the structure of the sheet filled with pages can be constructed and the folding can be simulated step-by-step is described on the basis of Figures 17 and 18. What effect the respective folding has is then known from this simulation. A position correction of the printed pages can thus be implemented fold-by-fold.

The algorithm proceeds from the distribution of the pages on the paper web, which is known from the imposition sequence (i.e. the parameter set prescribed in the "impose" work step). Figures 17a and 17b show the initial condition of the unfolded sheet, whereby Figure 17a shows the physical sheet and Figure 17b shows the corresponding logical and computer-convertible fold model equipped with logical variables (front page, back page, level, row, column, up, down) or, respectively, pointers in the form of a list structure for the signature.

Proceeding from the condition shown in Figures 17a and 17b, which page pair should folded onto one another next is successively determined according to Figure 18a. In step S1, a counter n is pre-occupied with 2 and a counter m is pre-occupied with 3 for this purpose, corresponding to the

second and third page. Subsequently, the sub-program, "Folding possible?", is started, see Figure 18b.

In step S13, the pages n and m are first sought therein in the two rows Row1 and Row2. Subsequently, three criteria are checked off in succession. A check is carried out in step S14 to see whether the two pages to be folded onto one another lie in the same row. If not, a finding is made next in step S18 as to whether the two pages n and m lie in the same column. When this is true, the program is ended, since the next fold is a matter of the signature fold (edge 44) around the second axis (residing perpendicular to all previous fold axes). Otherwise, a "no" output ensues (step S17); the two pages cannot be folded since they lie neither in the same row (step S17) nor in the same column (step S18).

When the query is step S14 os answered with yes, then the difference between the two column numbers of the pages n and m is formed next (step S15). When the difference yields an odd-numbered value, one can continue with step S16; otherwise, the output "no" ensues (step S17). Step S16 determines whether the pages n and m both lie on the lowest level or uppermost level in the folded signature as well as whether both pages are a front side or a back side. When this is the case, the pages can be folded onto one another in the current step and a "yes" output ensues (step S19). Otherwise, "no" is output (step S17).

When the return of the sub-program, "Folding possible?", into the main program (Figure 18a) ensues with the output "no", then a check is carried out there to see whether the current page pair also exists as an entry in the list of

the page pairs that were noted in advance (step S3). When this is not the case, then the current page pair is entered at the end of the list or pre-noted page pairs, "prio_list" (step S10) and, in step S11, the page counter for both elements of the page pair (n,m) is incremented by an offset of 2. Otherwise, one continues with step S7.

When, in contrast, the return from the sub-program (Figure 18b) into the main program (Figure 18a) ensues with the parameter, "yes", then the folding of the page pair onto one another is simulated in the main program, and the signature list (Figure 17b) is updated (step S2). A new page pair for which a folding is to be attempted must be found in the following steps. To this end, a check is carried out to see whether entries are present in the list for pre-noted entries (step S4). When this is the case, then a further check is carried out to see whether or not the current page pair (n, m) is also already contained in this list (step S5). If yes, then this can be removed from the list (step S6) since it was capable of being successfully folded (in step S2). When the pair (n, m) is not contained in the prio_list, the first page pair in the list becomes the new, current page pair for which a folding is attempted (step S9). When the query in step S4 does not apply, then one continues with step 11.

When the pair (n, m) was an element of the prio_list (step S5, S6), then a determination as to whether is it resided at the end of this list is made in step S7. If not, then the next page pair after (n, m) in the list becomes the new, current page pair (step S8). When, however, the query in step S7 is answered with yes, then the page counter for both elements of the page pair

(n, m) is incremented by an offset of 2 in the step 11. A check must thereby always be carried out in step 12 to see whether the values for n and m already lie outside the signature (n > total number of pages - 2, m > total number of pages - 1). The simulation program ends in this case; otherwise, a a folding is attempted anew for the new page pair (n, m).

Since the total number of pages on the sheet is known, attempts to fold are carried out until folding is no longer possible, i.e. either the sheet has been completely folded (folding around axis 44 has been reached) or the program determines that the pages are arranged such on the sheet such that further folding is no longer possible. In this case, an error message is output.

The position in the folded sheet was calculated for each page. The shift correction for the signature folding for each individual page is calculated dependent on this position and on the paper thickness (derived from the paper weight, which was previously input).

Figure 19 again shows an overview of the data-oriented work sequence (workflow) of an inventive system according to Figure 1. The data (PS, PDF, ...) generated in a first network 9 ((for instance, a customer network), for example from the programs Microsoft Word (registered trademark of Microsoft, Inc.), Quark (registered trademark of Quark, Inc.) or Frame Maker (registered trademark of Adobe Systems, Inc.), are thereby supplied to a print job manager 51 (PJM) either still within the network 9 or already within a print environment network 8. This print job manager first generates print job-specific data and commands such as a printer identification, a job class, etc. Then, on the one hand, it sends control data

(TIC) to a control program 52 (order distribution system ODS) and, on the other hand, send sends the print data (PS, PDF, ...) to a data converter 53, for example to the RIP 3 shown in Figure 1. Optionally, it can also send the print data to a data storage system 54 (print file manager PFM) that administers print datafiles of the most varied formats in a print file library 55 and that can send the datafiles as needed to an external archiving system 56, for example to what is referred to as a COLD system for storage on a CD-ROM.

The print data converted into a new data stream (IOCA) in the data converter are then supplied to the composer 57, in which the imposition pattern is defined and the other steps described in conjunction with Figures 2 through 18 for modifying the print data stream can be undertaken. The print data adapted in this way are then supplied to a print data spooler 58 that forms a queue and finally sends the print data to the printer 59 (see the printer 6 of Figure 1). The order distribution system 52 controls the events in the modules 53, 57 and 58 in an inter-system fashion.

Exemplary embodiments of the invention were described. It is thereby clear that arbitrary developments and modifications as well are possible. In addition to the parameters that have already been described for the implementation of the type area correction, for example, further influencing quantities (parameters) effected by post-processing devices such as folding equipment or binding equipment can be involved in the correction calculation. Such parameters can also be selectably pre-defined.

The invention is particularly suited for being realized in a computer program ((via software). It can thus be distributed in the form of a computer program module, as a datafile on a data carrier such as a diskette or a CD-ROM or as a datafile via a data or, respectively, communication network. Such These data files and comparable computer program products are incarnations of the invention. The inventive executive sequence can be applied in a computer, in a printer device or in a printing system with a following processing devices. It is thereby clear that the computer on which the program runs can contain known technical devices such as an input means ((a keyboard, mouse, touch or screen), a microprocessor, a data and control bus, a display device (monitor,(a monitor, or display) as well as a main memory, a hard disk storage and a network card.

List of Reference Characters

1 PoD printing system

2 host computer

3 RIP processor

4 print server

5 printer device

6 paper web

6a front side of the printed paper web

6b back side of the printed paper web

7 post-processing device

8 control line

9-LAN/WAN

- 10 client
- 12 main window
- 13 integrate symbol field
- 14 impose symbol field
- 15 assemble symbol field
- 16 merge command button
- 17 define objects region
- 20 creep folding query field
- 21 paper weight query field
- 24 print image
- 25 signature
- 26 cut edges
- 27 center fold
- 28 outer sheet
- 29 inner sheet
- 30 lateral edge of the paper web 6
- 31 outer edge of the print image 24
- 32 directions of the print image shift
- 34 signature print image shift
- 35 signature imposition pattern
- 36 first folded sheet
- 37 second folded sheet
- 38 signature
- 41 first fold axis

42 second fold axis

43 third fold-axis

44 fourth fold axis

45 fifth fold axis

50 level structure

51 print job manager

52 order distribution system

53 data converter

54 print file manager

55 print file library

56 archive

57 composer

58 spooler

59 printer device

a= spacing of the print image of the pages of the outer sheet 28 from the center fold 27

b= spacing of the print image of the page of the inner sheet 29 from the center fold Although other modifications and changes may be suggested by those skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.

----- REVISION LIST -----

The bracketed numbers refer to the Page and Paragraph for the **start** of the paragraph in both the **old** and the **new** documents.

[1:1 1:1] Add Paras "SPECIFICATION

TITLE"

[1:1 1:3] Changed "METHOD" to ""METHOD"

[1:2 1:3] Changed "The" to """

[1:2 1:4] Add Paras "BACKGROUND OF THE ... of the Invention"

[1:2 1:6] Changed "The " to "The present"

[1:3 1:7] Add Para "Description of the Related Art"

[1:5 1:10] Changed "can following" to "can be provided following"

[1:5 1:10] Changed "device, the" to "device so that the"

[1:5 1:10] Changed "being " to "are "

[1:6 2:1] Changed "specific versions ... the brochure" to "specific brochure"

[2:1 2:2] Changed "as high-performance " to "as in as high-performance a manner"

[2:1 2:2] Changed "signature as" to "signature in as"

[2:1 2:2] Changed "automated as" to "automated a manner as"

[2:2 3:1] Changed "-A-" to "Patent "

- [2:3 3:2] Changed "EP-A-741" to "European Patent reference EP-A-741"
- [2:3 3:2] Changed "respectively, WO-A-95/20185" to "respectively, ...
 - WO-A-95/20185"
- [2:4 3:3] Changed "EP-A-0" to "European Patent reference EP-A-0"
- [2:4 3:3] Changed "[...] " to "discloses "
- [2:5 3:4] Changed "US-A-5.398." to "US Patent No. 5.398."
- [2:5 3:4] Changed "US-A-5,398,289" to "US Patent No. 5,398,289"
- [3:1 4:1] Add Para "SUMMARY OF THE INVENTION"
- [3:1 4:2] Changed "the invention" to "the present invention"
- [3:2 4:3] Changed "the invention ... subclaims." to "a method for ... defined; "
- [3:2 4:4] Add Paras "and a position ... also provided.."
- [3:3 5:4] Changed "computer (print" to "computer (a print"
- [3:3 5:4] Changed "well (client" to "well (a client"
- [3:3 5:4] Changed "as imposition" to "as an imposition"
- [3:4 6:1] Changed "Tiis" to "This"
- [3:4 6:1] Changed "as type" to "as a type"
- [3:5 6:2] Changed "The invention" to "The present invention"
- [4:1 6:3] Changed "implemented computer-controlled" to "implemented under computer"
- [4:1 6:3] Changed "-controlled " to "control "
- [4:47:3] Changed "thereby page-by-page ... descending" to "thereby performed ... descending"
- [4:4 7:3] Changed "for position" to "for a position"

```
[4:5 7:4] Changed "calculated page-individually for each" to "calculated ...
                   page of each"
[5:2 8:3] Changed "Further advantages ... therein are:" to "BRIEF
                   DESCRIPTION OF THE DRAWINGS"
[5:3 8:4] Add Para "Further advantages ... of the Figures."
[5:3 8:5] Changed "Figure 1" to "Figure 1 is ... diagram showing "
[5:4 9:1] Changed "2 a" to "2 shows a ... screen with a"
[5:5 9:2] Changed "a" to "shows a dialog box or "
[5:6 9:3] Changed "a " to "shows a dialog box or "
[5:7 9:4] Changed "a" to "shows a dialog box or "
[5:8 9:5] Changed "6 a selection" to "6 shows a ... selection"
[5:9 9:6] Changed "a " to "shows a dialog box or "
[5:10 9:7] Changed
                          "a signature " to "shows a dialog box or "
[5:10 9:7] Changed
                          ";" to "for selecting a signature:"
[5:11 9:8] Changed
                          "a " to "is a dialog box or "
[5:12 9:9] Changed
                          "10 a selection" to "10 is a dialog ... selection"
[5:13 9:10] Changed
                          "a " to "is a dialog box or "
[6:1 9:11] Changed
                          "a " to "is a dialog box or "
[6:2 9:12] Changed
                          "a " to "is a dialog box or "
[6:2 9:12] Changed
                          "job offset;" to "a job offset;"
                          "Figure 14 " to "Figures 14a ... respectively, of "
[6:3 9:13] Changed
```

";" to "and Figure ... signature;"

"Figure 15 " to "Figure 15 ... illustration showing

[6:3 9:13] Changed

[6:4 9:14] Changed

[6:5 10:1] Changed	"16 the" to "16 shows the"
[6:6 10:2] Changed	"Figure 17 " to "Figures 17a and 17b show "
[6:7 10:3] Changed	"Figure 18 " to "Figures 18a and 18b show "
[6:8 10:4] Changed	"19 a" to "19 is a"
[6:9 10:5] Add Para	"DETAILED DESCRIPTION PREFERRED
	EMBODIMENTS"
[6:10 10:7] Changed	"as printer" to "as the printer"
[6:10 10:7] Changed	"in WO" to "in Published Applications WO"
[7:3 12:1] Changed	"flow) for" to "flow) in the display for"
[7:4 12:2] Changed	"14, 15." to "14 and 15."
[7:4 12:2] Changed	"(impose)" to "(the impose step)"
[8:4 13:2] Changed	"area, "settings"." to "area, identified as
	"settings"."
[8:4 13:2] Changed	"window, "selection"." to "window, identified as
	"selection"."
[8:7 13:5] Changed	", "cropping"," to ", entitled "cropping","
[8:7 13:5] Changed	"example, address" to "example, an address"
[9:2 14:2] Changed	"(folding, " to "(such as folding and "
[9:3 15:1] Changed	"(book, " to "(for instance book or "
[10:2 15:3] Changed	"Figure 14" to "Figures 14a, 14b and 14c"
[10:4 16:2] Changed	"14 " to " 14a "
[11:2 16:4] Add Para	"The input window specification."
[11:2 17:1] Changed	"EP 741 877 corresponding thereto" to

[11:4 17:3] Changed	"that implemented" to "that is implemented"
[12:2 18:2] Changed	"Figure 14 shows " to "Figures 14a sides of "
[12:2 18:2] Changed	"which, printed double-sided, a" to "which a"
[12:2 18:2] Changed	"25 is" to "25 as shown in Figure 14c is"
[12:5 19:1] Changed	"fold and" to "fold 27 and"
[12:6 19:2] Changed	"correction (creep" to "correction as a creep"
[12:6 19:2] Changed	"increases [sic] " to "is at an increased spacing "
[12:6 19:2] Changed	"line [sic] " to "arrow "
[12:6 19:2] Changed	"Figure 14" to "Figures 14a, 14b and 14c"
[12:6 19:2] Changed	"in arrow" to "in the arrow"
[13:1 19:3] Changed	"parameters (specific" to "parameters (for
	example, specific"
[13:16 20:11] Changed	"thickness can" to "thickness value can"
[13:16 20:11] Changed [14:20 21:19] Changed	"thickness can" to "thickness value can" "Figure 14" to "Figures 14a, 14b and 14c"
[14:20 21:19] Changed	"Figure 14" to "Figures 14a, 14b and 14c"
[14:20 21:19] Changed	"Figure 14" to "Figures 14a, 14b and 14c" "In Figure 14 but" to "In Figures and 14c but"
[14:20 21:19] Changed [16:4 24:2] Changed [16:4 24:2] Changed	"Figure 14" to "Figures 14a, 14b and 14c" "In Figure 14 but" to "In Figures and 14c but" "Figure 14" to "Figure 14a"
[14:20 21:19] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed	"Figure 14" to "Figures 14a, 14b and 14c" "in Figure 14 but" to "in Figures and 14c but" "Figure 14" to "Figure 14a" "ensues [sic] along" to "ensues along"
[14:20 21:19] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed	"Figure 14" to "Figures 14a, 14b and 14c" "In Figure 14 but" to "In Figures and 14c but" "Figure 14" to "Figure 14a" "ensues [sic] along" to "ensues along" "arrows " to "arrow direction "
[14:20 21:19] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed [18:3 27:1] Changed	"Figure 14" to "Figures 14a, 14b and 14c" "in Figure 14 but" to "in Figures and 14c but" "Figure 14" to "Figure 14a" "ensues [sic] along" to "ensues along" "arrows " to "arrow direction " "whether is resided" to "whether it resided"
[14:20 21:19] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed [18:3 27:1] Changed [19:1 27:2] Changed	"Figure 14" to "Figures 14a, 14b and 14c" "In Figure 14 but" to "in Figures and 14c but" "Figure 14" to "Figure 14a" "ensues [sic] along" to "ensues along" "arrows " to "arrow direction " "whether is resided" to "whether it resided" "arranged such on" to "arranged on"
[14:20 21:19] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed [16:4 24:2] Changed [18:3 27:1] Changed [19:1 27:2] Changed [19:1 27:2] Changed	"Figure 14" to "Figures 14a, 14b and 14c" "in Figure 14 but" to "in Figures and 14c but" "Figure 14" to "Figure 14a" "ensues [sic] along" to "ensues along" "arrows " to "arrow direction " "whether is resided" to "whether it resided" "arranged such on" to "arranged on" "sheet that" to "sheet such that"

[19:3 27:4] Changed	"hand, send the" to "hand, sends the"
[19:4 28:1] Changed	"in inter-system" to "in an inter-system"
[20:2 29:2] Changed	"program (software)." to "program (via software)."
[20:2 29:2] Changed	"Such " to "These data files "
[20:2 29:2] Changed	"with following" to "with a following"
[20:2 29:2] Changed	"as input means (keyboard," to "as an input
	keyboard,"
[20:2 29:2] Changed	"touch screen)," to "touch or screen),"
[20:2 29:2] Changed	"(monitor, " to "(a monitor, or "
[21:1 29:3] Del Paras	"List of Reference the center fold"

[22:22 29:3] Add Para "Although other ... contribution to the art."



531 Rec'd PCT/FT. 0 7 NOV 2001

TITLE

"METHOD FOR THE IMPOSITION OF PRINT DATA" BACKGROUND OF THE INVENTION

Field of the Invention

The present invention is directed to a method and to a system for the imposition of print data, particularly for processing a digital print data stream.

Description of the Related Art

A special area, what is referred to as "Print on Demand" (PoD) has arisen in the field of digital printing. A corresponding POD system has been described, for example, under the title "Entwicklung neuer Medien-Konzepte für POD-Dienstleister" in the periodical Deutscher Drucker, No. 35/98 of 17 September 1998.

Compared to conventional offset book printing, the advantages of such POD systems are that printed matter can be produced in a short time (just-in-time). Small editions of about 2 through 2000 copies can thus be economically published. A specific, currently required number of books can thus be printed in a short time on demand. Costs for warehousing as well as for remainders of books can thus be eliminated

On the other hand, there is the necessity in POD systems of likewise designing the layout of the printout in high-performance fashion, particularly the imposition of the print data. Whereas a relatively great deal of time is available for these procedures in conventional book printing, this procedure must be accomplished in a relatively short time in POD systems in order to be able to achieve the aforementioned advantages of a just-in-time production. This requirement is countered, on the one hand, by the fact that there are numerous

setting possibilities and demands during the course of a print production of books or bound brochures. In a POD printing system, a post-processing system following the printer device is usually connected, this compiling the material printed by the printing system to form a printed document such as a book or a brochure. For example, a saddle binder or a spiral binder can be provided following the printer device so that the printed pages are bound therewith to form a book or a brochure.

Further, a folding device can be provided between the printer device that prints the recording medium and the binding system when the POD printing system generates printed matter in signatures. The fundamentals and various specific brochure "Folding Techniques" issued by Stahl GmbH, a subsidiary of Heidelberger Druckmaschinen AG, 69115 Heidelberg, Order No. 1-800-437-7388 (Heidelberger). The content of this document is herewith incorporated by reference into the present specification. Various signature strategies and imposition patterns connected therewith are described in this document for sheet-fed printing systems and web-fed printing systems.

As already mentioned above, there is the demand in POD systems to implement the print data and, thus, the imposition event as well as in as high-performance a manner as possible, i.e. fast and largely automated. Accordingly, there is also the demand to design imposition patterns, i.e. the arrangement of the page sequence on the recording medium or, respectively, signature in as fully automated a manner as possible such that both the page sequence as well as the position of the print image on the pages of the ultimately produced printed matter (book, brochure or the like) exactly corresponds to the reading sequence. A further demand is to thereby achieve a specific registration precision of successive pages in

the printed matter. This demand is opposed by the shift of the print image in signature printing caused by folding the signature and cutting the edges.

US Patent 4,672,462 discloses a method and a system for recording a plurality of images on a light-sensitive film, whereby the images correspond to several pages of conventional book bindings. The layout of the print images is adapted to the binding before the exposure in conformity with the prescriptions of an operator.

European Patent reference EP-A-741 877 B1 or, respectively, International Published Application WO-A-95/20185 corresponding thereto discloses a printing system wherein various post-processing systems for processing the page stream printed on the paper through a device for binding documents are connected to a printer device.

European Patent reference EP-A-0 608 685 discloses a device for producing brochures from images that have been read in. For generating printed pages according to prescriptions, the images are automatically turned and adapted in terms of their dimensions.

US Patent No. 5,398, 289 discloses a method and a system for printing signatures. Upon output of individual sheets having up to four print pages, a position of the print images in the printing that is not exactly registered is corrected, this position having arisen as a result of a folding of the signature at the back margin. However, US Patent No. 5,398,289 discloses no possibility for correcting the print image shift on sheets caused by folding, said sheets having a plurality of fold axes for producing signatures.

SUMMARY OF THE INVENTION

An object of the present invention is to assure the registration precision of printed pages in printed matter produced with signatures even given a plurality of folds of the sheet, whereby rejects are to be avoided.

This object is achieved by a method for signature-by-signature editing of print

data in which the print data are edited for printing on at least one sheet in a logical page sequence corresponding to at least one signature, the signature forming a section of the printed product and containing a plurality of pages; at least one parameter of the recording medium on which the print data are printed and that is relevant for the position of the print image on the recording medium being folded in signatures is defined; and a position correction of the respective print image on the pages is implemented before the printing step dependent on the parameter, whereby the folds of the sheet needed for producing the signature are computationally simulated with the

assistance of a computer program so that the print images of successive pages of the folded signature lie exactly registered above one another, the folds ensuing in two directions perpendicular to one another, and the correction ensuing in the two

directions perpendicular to one another.

In a preferred method, the folds of the signature are computer-simulated for the position correction and the correction values for the print image of a page are calculated from the influence of each fold on the print image of at least this page. Specifically, the folds are simulated page-by-page with ascending or descending page numbers, whereby pairs of successive page numbers are respectively formed that, due to the signatures, come to lie on one another as a result of a fold and/or

between which a fold is provided due to the signature. A successive check is carried out to see whether a physical fold of the sheet is possible as a result whereof the pages of a page pair of successive pages are arranged in reading sequence after the sheet is folded to form the signature, whereby, when a fold is possible, a data-oriented fold is implemented and the page pair is entered in a list when a physical fold cannot be implemented. In one embodiment, the page pairs present in the list are processed with priority over the other page pairs until a non-foldable page pair in the list is processed.

The thickness of the recording medium may be acquired as parameter.

Further, all signatures of the printed recording medium that belong together are bound to form a print product.

The present invention also provides a printing system including at least one computer and a printer device for the implementation of a method according to the preceding. In the printing system, at least one post-processing device that cuts, folds and/or binds a recording medium printed by the printer device is provided to form a print product. A particular embodiment provides that the binding ensues in signatures.

Additionally, the present invention provides a computer program product for the implementation of method as set forth above. The computer program product has a data carrier, a datafile, a computer program module or a command sequence and/or a signal sequence. A computer on which a computer program product according to the foregoing is loaded is also provided..

According to a first aspect of the invention, print data are edited in a logical page sequence corresponding to one or more signatures. The editing can ensue

with a production process for printed matter (work flow), for example in a host computer, in a computer (a print server) preceding a printer device or on some other workstation as well (a client computer). In particular, the editing ensues as an imposition pattern in a production control program.

Further, it is inventively provided to implement a position correction of the imposed pages such that the print images of successive pages lie exactly registered relative to one another in the folded signature, i.e. in the finished printer matter. This position correction is also referred to below as a type area correction.

The present invention is based on the perception that the folding of printed sheets for producing signatures can be simulated on a computer. In the invention, the folding of the sheet is computer-simulated, particularly on the basis of the distribution of the printed pages on the sheet, i.e. on the basis of the signature pattern. The shift of the page positions within the printed matter that occurs due to the multiple folding of the sheet is compensated on the basis of a parameter of the recording medium, for example its thickness or its weight. Although there are a number of sequence variations for the individual folds to be implemented for a printed sheet, each of these variations must ultimately lead to the same folded result since the reading sequence from the first page to the last page within the finished printed matter must always be the same independently of the folding sequence.

It was also inventively recognized that the physical folding of a sheet can be computer-simulated, and that an automated correction of the fold-induced shift or, respectively, of a registration imprecision of successive printed pages can be implemented under computer control in the finished printed matter.

The invention achieves the advantage that the registration precision of successive printed pages is automatically produced without having to carry out investigations or calculations at the user side. The automatic correction thus ensues dependent on the indicated imposition strategy that defines the distribution of the printed pages on the sheet as well as dependent on a further parameter dependent on the nature of the recording medium such as the specific weight, diameter and/or material thereof.

Due to the largely automatic correction, the indicated solution is extremely user-friendly and leads to what is a faster overall production of printed matter.

An algorithm that calculates the correct folding of the printed sheet and simulates the shifts of the printed page caused as a result thereof particularly works on a page-by-page basis, whereby respective pairs of successive page numbers are formed that must be folded onto one another conditioned by the signature or, respectively, conditioned by the imposition strategy. In particular, the work sequence of the algorithm is thereby performed page-by-page in a ascending or a descending page sequence. A check is thereby initially carried out to see whether a fold between the two pairs is possible on the basis of the folds that ensued previously; potentially, the folding is simulated and the correction values for a position correction that result therefrom are calculated.

One advantage of the inventive method, wherein the position correction is calculated individually for each page of each signature, is that the method can also implement an automatic position correction for unusual signature patterns produced by the operator himself. Likewise, page correction values can be stored for standard

signatures as well as for standard recording media and can be directly called as warranted.

Further details of inventive, preferred correction methods or, respectively, calculation algorithms are explained in greater detail below on the basis of the Figure description.

A second aspect of the invention is directed to the executive work sequence (work flow) in the production of printed matter. It is provided during the course of the imposition of printed pages to initially subject a print data stream (for example, PCL or PostScript) to a raster process and to then further-process the rastered data page-by-page. It is initially provided during the course of this further-processing to merge information page-by-page, to overlay or crop the pages or to combine variable data with static data in the pages. The imposition of the print data ensues in the processing step following thereupon, whereby — optionally — standard signatures can be selected or individual signatures can be produced. Finally, printer-specific settings ensue, for instance the selection of input trays of the printer device as well as of the print region to be printed out.

BRIEF DESCRIPTION OF THE DRAWINGS

Further advantages and details of the invention are explained in greater detail on the basis of the Figures.

Figure 1 is a functional block diagram showing system components of a POD printing system;

Figure 2 shows a dialog box as displayed on a display screen with a selection menu in which the executive work sequence of an expanded imposition event becomes clear;

Figure 3 shows a dialog box or selection window for mixing data;

Figure 4 shows a dialog box or selection window for cropping images;

Figure 5 shows a dialog box or selection window for the overlay of print datafiles;

Figure 6 shows a dialog box or selection window for linking variable data into a print data stream;

Figure 7 shows a dialog box or selection window for defining an imposition strategy;

Figure 8 shows a dialog box or selection window for selecting a signature:

Figure 9 is a dialog box or selection window for positioning the pages on the printed sheet:

Figure 10 is a dialog box or selection window for the type area correction;

Figure 11 is a dialog box or selection window for the insertion of blank printed sheets:

Figure 12 is a dialog box or selection window for defining marks;

Figure 13 is a dialog box or selection window for defining input trays of a job offset:

Figures 14a and 14b are front and back pages, respectively, of a signature pattern and Figure 14c is a perspective view of the folded signature;

Figure 15 is a step-by-step illustration showing an example for folding a signature;

Figure 16 shows the print image of a page sequence that has had type area correction:

Figures 17a and 17b show an imposition strategy:

Figures 18a and 18b show a flowchart directed to the type area correction; and

Figure 19 is a work sequence diagram.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows a PoD printing system 1. It comprises a data source 2, for example a host computer, at which the print datafiles are output for printing via a network 9 (LAN, WAN) in a specific print data format, for example in PCL, PostScript or the like. These datafiles are conducted as needed to a raster image processor (RIP) 3 that converts the data of the datafiles into a pixel-based format such as, for example, TIFF or IOCA page-by-page. The page data that are generated in this fashion, for example in the IOCA format, are then supplied to the print server 4. The page data are edited job-specifically in the print server 4. In particular, the processing steps of an integration or, respectively, merging of data, the imposition as well as further processing of the imposed data thereby ensue. Data that were already rastered earlier and that are stored in the host computer 2 or in the print server 4 can also be directly employed in the integration. Another rastering process in the RIP processor 3 is then no longer necessary. Moreover, the RIP processor 3 can also be integrated in the host computer 2 or in the print server 4.

After the merging, imposition and fine processing of the imposed data, these are sent from the print server 4 to a printer device 5 and are printed therein onto a

recording medium, for example onto a paper web. Any type of printer device can be fundamentally employed as the printer device 5. For example, offset printing presses or printer devices that are based on other recording principles such as, for example, an electrophotographic principle are suitable. For example, electrophotographic printers are recited in Published International Patent Applications WO 99/09459 A1 and WO 98/27466 A1. The content of these two publications is herewith incorporated by reference into the present specification. The data as well as the connected printer devices can be provided both for monochromatic as well as for polychromatic printing.

Given the electrophotographic printer device 5 shown in Figure 1, the printed paper web 6 is supplied to a paper post-processing device 7. Thereat, the paper web 6 is cut, folded and ultimately bound to form a finished printed product, for example a book or a brochure. Even though this post-processing device 7 is shown here as a unit, it can be composed of a plurality of discrete devices, for example of a cutter device, a separate folding device and a separate binding device. The devices of the PoD printing system 1 are connected to one another in control-oriented terms by a common control line 8. A master device, for example the print server 4, controls the production sequence.

The host computer 2 is connected to various user computers 10 (clients) via the network 9. The clients 10 can send print orders to the PoD printing system 1. Various system settings are undertaken in conjunction with the print orders. These system settings can ensue either in the client 10, in the host 2 or, preferably, in the print server 4. The work sequence for undertaking the settings with respect to the

imposition of PoD print data is explained in greater detail on the basis of Figures 2 through 18.

Figure 2 illustrates the method sequence (work flow) in the form of a dialog box for display for producing a PoD-suited print data stream for the printer device 5.

The work sequence is first configured and then controlled by a computer program (software). The main window 12 of the running program shown in Figure 2 is the entry menu of the running computer program for setting the system parameters, i.e. for configuring the imposition job. It comprises three workflow symbol fields 13, 14 and 15. Work sequences that mix, overlay or blank out individual data are defined in the first symbol field 13. Before the actual imposition (the impose step), the work sequence corresponding to the symbol field 13 implements manipulations on the logical page level in the later processing of the print files. Parameters that define the imposition of the edited print datafile, i.e. the build-up of new physical pages from respectively one or more logical pages as well as the re-sorting of the pages, are determined in the second symbol field 14, "impose".

The possibility of processing the data stream resulting from "integrate" and "impose" on the physical page level exists with the third symbol field 15, "assemble". For example, the page layout can be post-processed therewith in that the positioning of the logical pages or images is modified, blank sheets are inserted or marks are placed on the sheets.

Each of the three symbol fields contains a plurality of command buttons that respectively open new windows for a more detailed definition of corresponding parameters.

Figure 3 shows the window that opens upon actuation of the command button 16, "merae", in the symbol field 15 (integrate).

This window is composed of three areas. The type of insertion, its position and the pages of the print data stream to be processed are indicated in the first area, identified as "settings". What source is to brought into communication with the data stream is indicated in the second window, identified as "selection". A list of the pages and parameters selected in this way can be seen in the third field. The modification of documents thereby ensues on the basis of the individual pages.

The flexibility of the overall system not only allows the joining of specific document pages but also allows other datafiles to be mixed (overlaid) into the print data stream to be printed out. The corresponding settings are undertaken in the window shown in Figure 5. An overlay datafile can thereby be selected, as can the corresponding pages of the document to be printed out and wherein this overlay is to be overlaid.

As a result of such a mixing, both the original page as well as the page (information) determined by the overlay can be seen in the ultimate printed product.

Images of the print data stream can be cropped, i.e. specific areas in the pages of the print data stream can be cut out, via the control button, entitled "cropping", or, respectively, via the selection window shown in Figure 4. Variable data, i.e. data from an external datafile (for example, an address datafile), can be selectively linked into the print datafile in such cropped areas or into areas of the print datafiles that are already empty per se. The corresponding settings are undertaken by the window shown in Figure 6. For example, this functionality allows a personalized printing of printed matter in that, for example, an individual, personal

dedication is printed on the first page of the printed matter, for example of each book.

The mask shown in Figure 7 is opened with the command button, "impose". Typical imposition parameters can be set in this window, for instance N-up (one-up, two-up, two-up with identical copies, etc.) and layout (tumble, work-and-turn, etc.). Further, various predefined standard imposition patterns can be selected and called. To that end, the format of the recording medium (A4, letter, etc.) in the printer is also selected or, respectively, indicated. When the option "identical copies" in the area "N-up" was selected, the size and the position of the copied fields can be set via the area 17 ("define objects..."). These printing parameters within a page can be optimized as a result thereof, for example when printing calling cards.

The signature division is defined via the command button, "signatures". This ensues in the window shown in Figure 8. The division of the total number of pages into sections (signatures) ensues via the register card, "sections". 20 sections are provided in the illustrated example, whereby the sections 17-20 each respectively comprise 24 pages. The smallest section (number 12) comprises only 12 pages. It is thus possible to freely select the respective scope of the sections with this functionality. On the one hand, this makes it possible to optimize the sections, i.e. the signatures, to the effect that as few blank pages as possible are produced. On the other hand, smaller signatures — which are less stable than larger signatures in the bound condition — can be centrally placed in the printed matter, so that the overall work has maximum stability in the bound condition. The signature marks that are required for the later processing steps (such as folding and binding) can be defined with the second register card, "mark".

The input file (data stream) is divided according to the set signatures in the workflow. Large printed sheets that must be multiply folded in order to then form a chapter of the ultimate printed matter (for instance book or periodicals) thereby arise corresponding to the signatures. It is standard that 4 through 96 logical pages be supported for the signatures, i.e. usually multiples of four logical pages, whereby there can also be a departure from both said rules in exceptional cases.

The window shown in Figure 9 is activated with the command button, "positioning", in the symbol field, "assemble. By way of exception, a sheet is referred to as "page" in this window. That the images of a page imposed on a sheet are to be printed centered can be optionally selected in this window. With this option, thus, it is possible to print the images, i.e. a printed paged, web-centered on a web-shaped recording medium, for example on paper. This option is particularly useful when the recording medium format specified in the print job does not exactly coincide with the format of the physical recording medium.

Figure 10 shows the input window with which the parameters for the initially described type area correction are defined given folded paper webs. Parameters about the nature of the folding are queried in the query field 20. The version, "standard folding" is selected when sheets are only folded around a single edge. This, for example, is the case when a paper web is printed, the paper web is cut into individual sheets, the individual sheets are placed on top of one another and, finally, all sheets are folded over a common edge and stitched together. A type of processing with the same result would be that individual sheets (cut sheets) having a smaller format such as, for example, DIN A4 or DIN A3 are printed, are then likewise placed on top of one another and, finally, folded over the common middle edge and

stitched. The option, "inside" or "outside", defines whether the original page positioning on the inner sheet of the signature or on the outer sheet of the signature is preserved. This function is described in greater detail later in Figures 14a, 14b and 14c.

Whereas the version, "standard folding", is only selected for sheets that are folded over a single edge, the version, "signature folding", is selected when folding is carried out over two axes residing perpendicularly on one another. This version will be discussed in detail later on the basis of Figure 15.

The specific weight of the paper (for example, 70 g/m²) is input with the query field 21, "paper weight". Inventively, a correction quantity with reference whereto the individual offset of the print image on the page or, respectively, the quantities required for the type area correction are calculated is determined from this parameter. Details about this calculation are described in greater detail in conjunction with Figures 14a through 17.

In addition to or instead of the paper weight, further parameters of recording media, for example the type of material (paper, film, cloth), the thickness of the recording material or the like, can be indicated in the window, "define creep", in an alternative exemplary embodiment. It can also be provided to allocate these particulars to a specific signature (for example, signature No.12 in Figure 8) and/or to undertake a corresponding allocation to one of several connected printer devices.

The input window for "blank sheets" shown in Figure 11 allows inputs with which blank sheets can be inserted at specific positions before or after printed sheets. In ongoing printing operations, this can particularly ensue with an arrangement that is disclosed by European Patent Document EP 741 877 B1 or,

respectively, in Published International Patent Application WO-A-95/20185 corresponding thereto. An external charging (EB) with which, for example, colored or separating sheets pre-printed elsewhere can be inserted into the sheet stream printed by the PoD printer device before the different sheets of a document are joined and bound to form the document is also provided with the buffer memory shown thereat in Figure 1. The content of this earlier publication (EP '877) is incorporated by reference into the present specification.

The input window for "blank sheets" shown in Figure 11 allows inputs with which blank sheets can be inserted at specific positions before or after printed sheets. In ongoing printing operations, this can particularly ensue with an arrangement that is disclosed by European Patent Document EP 741 877 B1. An external charging (EB) with which, for example, colored or separating sheets preprinted elsewhere can be inserted into the sheet stream printed by the PoD printer device before the different sheets of a document are joined and bound to form the document is also provided with the buffer memory shown thereat in Figure 1. The content of this earlier publication (EP '877) is incorporated by reference into the present specification.

Marks, for example cut marks, end-of-job marks or other, user-specific marks, can be applied to specific pages of the imposed print data with the input window indicated in Figure 12.

Paper input trays can be selected and a job offset function can be activated sheet-by-sheet with the input window shown in Figure 13. These selection functions are particularly relevant given output with single-sheet printer devices. The job offset function makes it possible to sort the individual sheets (signatures) by

signatures or, respectively, jobs and to thus potentially support a compile function that is implemented manually or by machine.

The command button, "print range", shown in Figure 2 makes it possible to define a print range and to print only a sub-region of the datafile as an alternative to a complete print datafile. This is especially advantageous for a proof. As a result thereof, critical sub-regions can be tested, for example the print out of individualized regions of the print job or the overlay of various pages.

Figures 14a and 14b show both sides of a printed paper web on which a "two up" pattern is printed. The front side 6a of the paper web carries the page numbers 1, 4, 5, 8, 9, 12, 13 and 16, and the back side 6b of the paper web carries the page numbers 2, 3, 6, 7, 10, 11, 14 and 15. When it is assumed that a signature 25 as shown in Figure 14c is formed from these 16 pages in that the paper web is respectively cut to sheets at the cut edges 16, successive sheets are placed on top of one another and, finally, are folded around the common center fold 27, then the following condition must be met so that pages following one another lie on top of one another with exact registration, i.e. a registration correction is implemented given standard folding.

The logical printed pages with the numbers 1, 2, 15 and 16 of the outer sheet 28 of the signature 25 must be placed farthest outside on the paper web, whereas the logical pages — the farther the sheets lie inside in the folded signature 25 — must be positioned farther in toward the middle fold 27. The following thus applies mathematically:

whereby 'a' references the distance of the print image of the pages of the outer sheet from the center fold 27 and 'b' references the distance of the print image of the pages of the inner sheet 29 from the center fold 27.

One effect of this type area correction (also referred to as a creep function) is that the outer edge 31 of the print image 24 is at an increased spacing from the lateral edge 30 of the paper web 6 from the outer sheet to the inner sheet. The shift of the print images thus ensues in the direction of the arrow 32 indicated in Figures 14a, 14b and 14c. The parameters "inside" or, respectively, "outside" in the query field 20 (Figure 10) determine whether the original page positioning is to be preserved on the inner sheet 29 or on the outer sheet 28 of the signature 25. When the user decides in favor of the "inside" option, then the logical pages — proceeding from the inner sheet 29 — migrate farther toward the outside opposite the arrow direction 32. When the "outside" option is selected, then the original position of the print image 24 on the outer sheet 28 is preserved, and the print images on all other sheets are shifted inward in the arrow direction 32 toward the center fold 27.

For calculating the sheet-by-sheet print image offset, conclusions about the paper thickness are drawn from the parameters (for example, specific paper weight) indicated in Figure 10, a step width is calculated for the print image shift per sheet, and an individual correction shift value is defined for each page of the sheet. The following algorithm (algorithm 1) is applied for this purpose:

```
if (inside)
    pweights_init = 0 - weight * sheet_ges - 1
else
    pweights_init = 0
```

```
correction shift value = (pweights_init + weight * (lage - 1)) / a * lunits * (dpi / STD_MPI),
```

whereby the following apply:

a = an empirically determined parameter for a specific paper grade; for example, a factor a = 500 has proven beneficial for a standard paper with a specific weight of 80 g/m²,

sheets_ges = plurality of sheets

weight = paper weight in grams/m² (for example, weight = 80)

(if "inside" => negative operational sign, i.e.: -80)

lage = page position in the sheet, calculated according to algorithm 2
lunits = 1 unit/pel

dpi = current resolution, for example 600 pel/inch

STD MPI = 25.4 mm/inch.

Instead of specifying the specific weight and the correspondingly stored value of the quantity 'a', the paper thickness value can be deposited in a table. A corresponding shift value is then determined for each sheet and the logical pages situated on the sheet. Instead of calculating the shift value, it is also possible to select or, respectively, input the shift value from the user. The sheet number or, respectively, the position of the page in the folded sheet is determined dependent on the page number. In the case of "standard folding", all sheets are folded around the center fold (27). The determination of the parameter "lage" then ensues according to the following algorithm (algorithm 2):

if

```
(page nr <= pages ges/2 and page nr even-numbered)
   then → lage = page nr/2
   else if
   (page_nr <= pages_ges/2 and page_nr odd-numbered)
          then \Rightarrow lage = (page nr + 1)/2
   else if
   (page nr > pages ges and page nr even-numbered)
          then \rightarrow lage = (2 * pages ges/2 - page nr + 2) / 2
   else if
   (page_nr > pages_ges and page_nr odd-numbered)
           then → lage = (2 * pages_ges/2 - page_nr + 1) / 2,
whereby the following apply:
    (page nr)
                 = page number, and
    (pages ges) = total number of pages.
The position determined in this way is the multiplier in algorithm 1 for the
correction shift value of the corresponding page.
       Example for the calculation of the correction shift according to the two
algorithms that have been described:
    Standard folding: "inside"
    Paper weight (g/m2): 80
    Signature and page distribution as in Figures 14a, 14b and 14c
```

→ weight = -80

→ sheets ges = 4

```
→ pweights_init = 0 - (-80 * (4 - 1)) = 240
```

→ correction shift = (240-80 * (lage -1)) / 500 * 600/25.4

lage = 1: correction shift value = 0.48 mm (11 lunits)

lage = 2: correction shift value = 0.32 mm (8 lunits)

lage = 3: correction shift value = 0.16 mm (4 lunits)

lage = 4: correction shift value = 0.00 mm (0 lunits)

Figure 15 shown an imposition pattern 35 for a signature printing wherein folds ensue in folding axes that are perpendicular to one another. The imposition pattern 35 comprises 32 logical pages, whereby the numbers of the pages that are printed on the front side of the paper web 6 are referenced without parentheses, and the number of the pages that are printed on the back side of the paper web are provided with parentheses. Page 1, thus, is printed on the front side, whereas page 2 is printed on the back side.

The signature or, respectively, the sheet allocated to this signature comprises 32 pages. The folding event ensues in a plurality of steps, whereby the result of the folding due to the reading sequence of the finished printed matter (page sequence 1, 2, 3, ...32) is already fixed in advance. It follows therefrom that the folding event is an event that can be unambiguously described. Given the example shown in Figure 15, the event can be subdivided into three sub-steps.

A zig-zag folding at the three fold edges 41, 42 and 43 ensues in the first sub-step. This procedure leads to the folded sheet 35. When this sheet

36 is folded over the folding axis 44, then the folded sheet 37 arises in the second sub-step. This is folded around the center fold axis 45 in the third sub-step and cut at the remaining axes, the signature 38 arising as a result thereof.

The folding events that have just been described can be described in the following way, logically abstracted:

In an n-dimensional space, let the logical page numbers be arranged corresponding to their positions on the recording medium and to the folded condition of the latter. When, for example, all pages of the paper web given a two-up printing are situated in a plane (level) corresponding to the situation during printing, then the space is four-dimensional corresponding to the front side or, respectively, the back side of the recording medium and a respective row and a column. The dimension is increased at least in regions with specific folding operations. For example, the dimension is doubled by a folding for all those positions that are folded onto one another.

It can be seen with reference to the example of Figure 15 that the space multiplies to a dimension 16 with the first sub-step, i.e. with the zig-zag fold. In the diagram 50, the logical page arrangement is correspondingly indicated with four levels E1, E2, E3 and E4 each having two pages (front side and back side), one respective row and one respective column. After the folding around the center axis 44, the level structure 51 then derives that has exactly twice the number of levels as the level structure 50, namely 8 levels each having two pages. Accordingly, the space to be described is 32-dimensional.

Such a logical level structure can be imaged without further ado in data-oriented terms by corresponding tables or variables with addresses (pointers). Accordingly, the physical folding of sheets can be simulated without further ado in data-oriented terms.

As shown in Figure 16, a fold-conditioned position shift of the printed pages within a signature can be replicated from the simulated folds and from the knowledge of the paper web thickness and, thus, can also be corrected. This position correction then ensues not only along one axis as in Figures 14a, 14b and 14c but also along a second fold axis that is perpendicular to the first axis. Whereas — as was already the case in Figure 14a — the print image shifts ensues along the arrow direction 32 corresponding to the folding relative to the center fold axis 45, additional print image shifts along arrow 34 and corresponding to the signature folding around the fold axis 44 that are perpendicular thereto are provided given the signature folding shown in Figure 16.

The algorithm with which the distribution of the pages, the structure of the sheet filled with pages can be constructed and the folding can be simulated step-by-step is described on the basis of Figures 17 and 18. What effect the respective folding has is then known from this simulation. A position correction of the printed pages can thus be implemented fold-by-fold.

The algorithm proceeds from the distribution of the pages on the paper web, which is known from the imposition sequence (i.e. the parameter set prescribed in the "impose" work step). Figures 17a and 17b show the initial condition of the unfolded sheet, whereby Figure 17a shows the physical sheet

and Figure 17b shows the corresponding logical and computer-convertible fold model equipped with logical variables (front page, back page, level, row, column, up, down) or, respectively, pointers in the form of a list structure for the signature.

Proceeding from the condition shown in Figures 17a and 17b, which page pair should folded onto one another next is successively determined according to Figure 18a. In step S1, a counter n is pre-occupied with 2 and a counter m is pre-occupied with 3 for this purpose, corresponding to the second and third page. Subsequently, the sub-program, "Folding possible?", is started, see Figure 18b.

In step S13, the pages n and m are first sought therein in the two rows Row1 and Row2. Subsequently, three criteria are checked off in succession. A check is carried out in step S14 to see whether the two pages to be folded onto one another lie in the same row. If not, a finding is made next in step S18 as to whether the two pages n and m lie in the same column. When this is true, the program is ended, since the next fold is a matter of the signature fold (edge 44) around the second axis (residing perpendicular to all previous fold axes). Otherwise, a "no" output ensues (step S17); the two pages cannot be folded since they lie neither in the same row (step S17) nor in the same column (step S18).

When the query is step S14 os answered with yes, then the difference between the two column numbers of the pages n and m is formed next (step S15). When the difference yields an odd-numbered value, one can continue with step S16; otherwise, the output "no" ensues (step S17). Step S16

determines whether the pages n and m both lie on the lowest level or uppermost level in the folded signature as well as whether both pages are a front side or a back side. When this is the case, the pages can be folded onto one another in the current step and a "yes" output ensues (step S19). Otherwise. "no" is output (step S17).

When the return of the sub-program, "Folding possible?", into the main program (Figure 18a) ensues with the output "no", then a check is carried out there to see whether the current page pair also exists as an entry in the list of the page pairs that were noted in advance (step S3). When this is not the case, then the current page pair is entered at the end of the list or pre-noted page pairs, "prio_list" (step S10) and, in step S11, the page counter for both elements of the page pair (n,m) is incremented by an offset of 2. Otherwise, one continues with step S7.

When, in contrast, the return from the sub-program (Figure 18b) into the main program (Figure 18a) ensues with the parameter, "yes", then the folding of the page pair onto one another is simulated in the main program, and the signature list (Figure 17b) is updated (step S2). A new page pair for which a folding is to be attempted must be found in the following steps. To this end, a check is carried out to see whether entries are present in the list for pre-noted entries (step S4). When this is the case, then a further check is carried out to see whether or not the current page pair (n, m) is also already contained in this list (step S5). If yes, then this can be removed from the list (step S6) since it was capable of being successfully folded (in step S2). When the pair (n, m) is not contained in the prio list, the first page pair in the

list becomes the new, current page pair for which a folding is attempted (step S9). When the query in step S4 does not apply, then one continues with step 11.

When the pair (n, m) was an element of the prio_list (step S5, S6), then a determination as to whether it resided at the end of this list is made in step S7. If not, then the next page pair after (n, m) in the list becomes the new, current page pair (step S8). When, however, the query in step S7 is answered with yes, then the page counter for both elements of the page pair (n, m) is incremented by an offset of 2 in the step 11. A check must thereby always be carried out in step 12 to see whether the values for n and m already lie outside the signature (n > total number of pages - 2, m > total number of pages - 1). The simulation program ends in this case; otherwise, a a folding is attempted anew for the new page pair (n, m).

Since the total number of pages on the sheet is known, attempts to fold are carried out until folding is no longer possible, i.e. either the sheet has been completely folded (folding around axis 44 has been reached) or the program determines that the pages are arranged on the sheet such that further folding is no longer possible. In this case, an error message is output.

The position in the folded sheet was calculated for each page. The shift correction for the signature folding for each individual page is calculated dependent on this position and on the paper thickness (derived from the paper weight, which was previously input).

Figure 19 again shows an overview of the data-oriented work sequence (workflow) of an inventive system according to Figure 1. The data

(PS, PDF, ...) generated in a first network 9 (for instance, a customer network), for example from the programs Microsoft Word (registered trademark of Microsoft, Inc.), Quark (registered trademark of Quark, Inc.) or Frame Maker (registered trademark of Adobe Systems, Inc.), are thereby supplied to a print job manager 51 (PJM) either still within the network 9 or already within a print environment network 8. This print job manager first generates print job-specific data and commands such as a printer identification, a job class, etc. Then, on the one hand, it sends control data (TIC) to a control program 52 (order distribution system ODS) and, on the other hand, sends the print data (PS, PDF, ...) to a data converter 53, for example to the RIP 3 shown in Figure 1. Optionally, it can also send the print data to a data storage system 54 (print file manager PFM) that administers print datafiles of the most varied formats in a print file library 55 and that can send the datafiles as needed to an external archiving system 56, for example to what is referred to as a COLD system for storage on a CD-ROM.

The print data converted into a new data stream (IOCA) in the data converter are then supplied to the composer 57, in which the imposition pattern is defined and the other steps described in conjunction with Figures 2 through 18 for modifying the print data stream can be undertaken. The print data adapted in this way are then supplied to a print data spooler 58 that forms a queue and finally sends the print data to the printer 59 (see the printer 6 of Figure 1). The order distribution system 52 controls the events in the modules 53, 57 and 58 in an inter-system fashion.

Exemplary embodiments of the invention were described. It is thereby clear that arbitrary developments and modifications as well are possible. In addition to the parameters that have already been described for the implementation of the type area correction, for example, further influencing quantities (parameters) effected by post-processing devices such as folding equipment or binding equipment can be involved in the correction calculation. Such parameters can also be selectably pre-defined.

The invention is particularly suited for being realized in a computer program (via software). It can thus be distributed in the form of a computer program module, as a datafile on a data carrier such as a diskette or a CD-ROM or as a datafile via a data or, respectively, communication network. These data files and comparable computer program products are incarnations of the invention. The inventive executive sequence can be applied in a computer, in a printer device or in a printing system with a following processing devices. It is thereby clear that the computer on which the program runs can contain known technical devices such as an input means (a keyboard, mouse, touch or screen), a microprocessor, a data and control bus, a display device (a monitor, or display) as well as a main memory, a hard disk storage and a network card.

Although other modifications and changes may be suggested by those skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.

S. Carlo


WELTORGANISATION FÜR GEISTIGES EIGENTUM Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 7: (11) Internationale Veröffentlichungsnummer: WO 00/68877 A1 G06K 15/00 (43) Internationales Veröffentlichungsdatum: 16. November 2000 (16,11,00) (81) Bestimmungsstaaten: CA, JP, US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). (21) Internationales Aktenzeichen: PCT/EP00/04041 (22) Internationales Anmeldedatum: 5. Mai 2000 (05.05.00) (30) Prioritätsdaten: Veröffentlicht Mit internationalem Recherchenbericht. 199 21 120.5 7. Mai 1999 (07.05.99) DE Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen (71) Anmelder (für alle Bestimmungsstaaten ausser US): OCE PRINTING SYSTEMS GMBH (DE/DE): Siemensallee 2. 85586 Poing (DE). (72) Erfinder; und (75) Erfinder/Anmelder (nur für US): KOWALSKI, Jacok [DE/DE]; Evrystrasse 40, 53844 Troisdorf (DE). WEGELE, Petra [DE/DE]; Parkstrasse 4, 80339 München (DE). (74) Anwälte: SCHAUMBURG, Karl-Heinz usw.; Postfach 86 07 48, D-81634 München (DE). đ ř

(54) Title: METHOD AND SYSTEM FOR IMPOSING PRINT DATA

(54) Bezeichnung: VERFAHREN UND SYSTEM ZUM AUSSCHIESSEN VON DRUCKDATEN



(57) Abstract

The invention relates to a method, a system and a computer programme for making an image area correction in a printing system. Printing data are provided in a logical page order corresponding to at least one signature (25), for printing. At least one parameter of a recording medium (6) or which the print data are printed is determined, this parameter being relevant to the position of the printing format on the recording medium (6), which is folded according to the signature. The position of the pages is then corrected according to this parameter print to printing. In such a way that the print formats of successive pages of the finished signature are distincted according to this

-

10

15

2.0

25

30

14 pels

531 Rec'd PCT/T 0 7 NOV 2001

1

METHOD FOR THE IMPOSITION OF PRINT DATA

The invention is directed to a method and to a system for the imposition of print data, particularly for processing a digital print data stream.

A special area, what is referred to as "Print on Demand" (PoD) has arisen in the field of digital printing. A corresponding POD system has been described, for example, under the title "Entwicklung neuer Medien-Konzepte für POD-Dienstleister" in the periodical Deutscher Drucker, No. 35/98 of 17 September 1998.

Compared to conventional offset book printing, the advantages of such POD systems are that printed matter can be produced in a short time (just-in-time). Small editions of about 2 through 2000 copies can thus be economically published. A specific, currently required number of books can thus be printed in a short time on demand. Costs for warehousing as well as for remainders of books can thus be eliminated.

On the other hand, there is the necessity in POD systems of likewise designing the layout of the printout in high-performance fashion, particularly the imposition of the print data. Whereas a relatively great deal of time is available for these procedures in conventional book printing, this procedure must be accomplished in a relatively short time in POD systems in order to be able to achieve the aforementioned advantages of a just-in-time production. This requirement is countered, on the one hand, by the fact that there are numerous setting possibilities and demands during the course of a print production of books or bound brochures. In a POD printing system, a post-processing system following the printer device is usually connected, this compiling the material printed by the printing system to form a printed document such as a book or a brochure. For example, a saddle binder or a spiral binder can following the printer device, the printed pages being bound therewith to form a book or a brochure

Further, a folding device can be provided between the printer device that prints the recording medium and the binding system when the POD printing system generates printed matter in signatures. The fundamentals and various specific versions of folding techniques and signatures are described, for example, in the

10

15

20

25

10/019853

531 Rec'd PCT/PTC 0 7 NOV 2001

1

brochure "Folding Techniques" issued by Stahl GmbH, a subsidiary of Heidelberger Druckmaschinen AG, 69115 Heidelberg, Order No. 1-800-437-7388 (Heidelberger). The content of this document is herewith incorporated by reference into the present specification. Various signature strategies and imposition patterns connected therewith are described in this document for sheet-fed printing systems and web-fed printing systems.

As already mentioned above, there is the demand in POD systems to implement the print data and, thus, the imposition event as well as high-performance as possible, i.e. fast and largely automated. Accordingly, there is also the demand to design imposition patterns, i.e. the arrangement of the page sequence on the recording medium or, respectively, signature as fully automated as possible such that both the page sequence as well as the position of the print image on the pages of the ultimately produced printed matter (book, brochure or the like) exactly corresponds to the reading sequence. A further demand is to thereby achieve a specific registration precision of successive pages in the printed matter. This demand is opposed by the shift of the print image in signature printing caused by folding the signature and cutting the edges.

US-A-4,672,462 discloses a method and a system for recording a plurality of images on a light-sensitive film, whereby the images correspond to several pages of conventional book bindings. The layout of the print images is adapted to the binding before the exposure in conformity with the prescriptions of an operator.

EP-A-741 877 B1 or, respectively, WO-A-95/20185 corresponding thereto discloses a printing system wherein various post-processing systems for processing the page stream printed on the paper through a device for binding documents are connected to a printer device.

EP-A-0 608 685 [...] a device for producing brochures from images that have been read in. For generating printed pages according to prescriptions, the images are automatically turned and adapted in terms of their dimensions.

US-A-5,398, 289 discloses a method and a system for printing signatures.

30 Upon output of individual sheets having up to four print pages, a position of the print images in the printing that is not exactly registered is corrected, this position having

10

arisen as a result of a folding of the signature at the back margin. However, US-A-5,398,289 discloses no possibility for correcting the print image shift on sheets caused by folding, said sheets having a plurality of fold axes for producing signatures.

An object of the invention is to assure the registration precision of printed pages in printed matter produced with signatures even given a plurality of folds of the sheet, whereby rejects are to be avoided.

This object is achieved by the invention described in the independent claims. Advantageous developments of the invention are the subject matter of the subclaims.

According to a first aspect of the invention, print data are edited in a logical page sequence corresponding to one or more signatures. The editing can ensue with a production process for printed matter (work flow), for example in a host

10

15

20

25

30

computer, in a computer (print server) preceding a printer device or on some other workstation as well (client computer). In particular, the editing ensues as imposition pattern in a production control program.

Further, it is inventively provided to implement a position correction of the imposed pages such that the print images of successive pages lie exactly registered relative to one another in the folded signature, i.e. in the finished printer matter. Tjis position correction is also referred to below as type area correction.

The invention is based on the perception that the folding of printed sheets for producing signatures can be simulated on a computer. In the invention, the folding of the sheet is computer-simulated, particularly on the basis of the distribution of the printed pages on the sheet, i.e. on the basis of the signature pattern. The shift of the page positions within the printed matter that occurs due to the multiple folding of the sheet is compensated on the basis of a parameter of the recording medium, for example its thickness or its weight. Although there are a number of sequence variations for the individual folds to be implemented for a printed sheet, each of these variations must ultimately lead to the same folded result since the reading sequence from the first page to the last page within the finished printed matter must always be the same independently of the folding sequence.

It was also inventively recognized that the physical folding of a sheet can be computer-simulated, and that an automated correction of the fold-induced shift or, respectively, of a registration imprecision of successive printed pages can be implemented computer-controlled in the finished printed matter.

The invention achieves the advantage that the registration precision of successive printed pages is automatically produced without having to carry out investigations or calculations at the user side. The automatic correction thus ensues dependent on the indicated imposition strategy that defines the distribution of the printed pages on the sheet as well as dependent on a further parameter dependent on the nature of the recording medium such as the specific weight, diameter and/or material thereof.

Due to the largely automatic correction, the indicated solution is extremely user-friendly and leads to what is a faster overall production of printed matter.

10

15

20

25

30

An algorithm that calculates the correct folding of the printed sheet and simulates the shifts of the printed page caused as a result thereof particularly works on a page-by-page basis, whereby respective pairs of successive page numbers are formed that must be folded onto one another conditioned by the signature or, respectively, conditioned by the imposition strategy. In particular, the work sequence of the algorithm is thereby page-by-page in ascending or descending page sequence. A check is thereby initially carried out to see whether a fold between the two pairs is possible on the basis of the folds that ensued previously; potentially, the folding is simulated and the correction values for position correction that result therefrom are calculated.

One advantage of the inventive method, wherein the position correction is calculated page-individually for each signature, is that the method can also implement an automatic position correction for unusual signature patterns produced by the operator himself. Likewise, page correction values can be stored for standard signatures as well as for standard recording media and can be directly called as warranted.

Further details of inventive, preferred correction methods or, respectively, calculation algorithms are explained in greater detail below on the basis of the Figure description.

A second aspect of the invention is directed to the executive work sequence (work flow) in the production of printed matter. It is provided during the course of the imposition of printed pages to initially subject a print data stream (for example, PCL or PostScript) to a raster process and to then further-process the rastered data page-by-page. It is initially provided during the course of this further-processing to merge information page-by-page, to overlay or crop the pages or to combine variable data with static data in the pages. The imposition of the print data ensues in the processing step following thereupon, whereby -- optionally -- standard signatures can be selected or individual signatures can be produced. Finally, printer-specific settings ensue, for instance the selection of input trays of the printer device as well as of the print region to be printed out. Further advantages and details of the

invention are explained in greater detail on the basis of the Figures. Shown therein are:

- Figure 1 system components of a POD printing system;
- Figure 2 a selection menu in which the executive work sequence of an expanded imposition event becomes clear;
 - Figure 3 a selection window for mixing data;
 - Figure 4 a selection window for cropping images;
 - Figure 5 a selection window for the overlay of print datafiles;
 - Figure 6 a selection window for linking variable data into a print data stream;
- 10 Figure 7 a selection window for defining an imposition strategy;
 - Figure 8 a signature selection window;
 - Figure 9 a selection window for positioning the pages on the printed sheet:
 - Figure 10 a selection window for the type area correction;
 - Figure 11 a selection window for the insertion of blank printed sheets;
- 15 Figure 12 a selection window for defining marks:
 - Figure 13 a selection window for defining input trays of job offset;
 - Figure 14 a signature pattern;
 - Figure 15 an example for folding a signature;
 - Figure 16 the print image of a page sequence that has had type area correction;
- 20 Figure 17 an imposition strategy;
 - Figure 18 a flowchart directed to the type area correction; and
 - Figure 19 a work sequence diagram.

Figure 1 shows a PoD printing system 1. It comprises a data source 2, for example a host computer, at which the print datafiles are output for printing via a

- 25 network 9 (LAN, WAN) in a specific print data format, for example in PCL,
 - PostScript or the like. These datafiles are conducted as needed to a raster image processor (RIP) 3 that converts the data of the datafiles into a pixel-based format such as, for example, TIFF or IOCA page-by-page. The page data that are generated in this fashion, for example in the IOCA format, are then supplied to the print server 4. The
- 30 page data are edited job-specifically in the print server 4. In particular, the processing steps of an integration or, respectively, merging of data, the imposition as well as

10

15

20

25

30

further processing of the imposed data thereby ensue. Data that were already rastered earlier and that are stored in the host computer 2 or in the print server 4 can also be directly employed in the integration. Another rastering process in the RIP processor 3 is then no longer necessary. Moreover, the RIP processor 3 can also be integrated in the host computer 2 or in the print server 4.

After the merging, imposition and fine processing of the imposed data, these are sent from the print server 4 to a printer device 5 and are printed therein onto a recording medium, for example onto a paper web. Any type of printer device can be fundamentally employed as printer device 5. For example, offset printing presses or printer devices that are based on other recording principles such as, for example, an electrophotographic principle are suitable. For example, electrophotographic printers are recited in WO 99/09459 A1 and WO 98/27466 A1. The content of these two publications is herewith incorporated by reference into the present specification. The data as well as the connected printer devices can be provided both for monochromatic as well as for polychromatic printing.

Given the electrophotographic printer device 5 shown in Figure 1, the printed paper web 6 is supplied to a paper post-processing device 7. Thereat, the paper web 6 is cut, folded and ultimately bound to form a finished printed product, for example a book or a brochure. Even though this post-processing device 7 is shown here as a unit, it can be composed of a plurality of discrete devices, for example of a cutter device, a separate folding device and a separate binding device. The devices of the PoD printing system 1 are connected to one another in control-oriented terms by a common control line 8. A master device, for example the print server 4, controls the production sequence.

The host computer 2 is connected to various user computers 10 (clients) via the network 9. The clients 10 can send print orders to the PoD printing system 1. Various system settings are undertaken in conjunction with the print orders. These system settings can ensue either in the client 10, in the host 2 or, preferably, in the print server 4. The work sequence for undertaking the settings with respect to the imposition of PoD print data is explained in greater detail on the basis of Figures 2 through 18.

10

15

20

25

3.0

Figure 2 illustrates the method sequence (work flow) for producing a PoDsuited print data stream for the printer device 5.

The work sequence is first configured and then controlled by a computer program (software). The main window 12 of the running program shown in Figure 2 is the entry menu of the running computer program for setting the system parameters, i.e. for configuring the imposition job. It comprises three workflow symbol fields 13, 14, 15. Work sequences that mix, overlay or blank out individual data are defined in the first symbol field 13. Before the actual imposition (impose), the work sequence corresponding to the symbol field 13 implements manipulations on the logical page level in the later processing of the print files. Parameters that define the imposition of the edited print datafile, i.e. the build-up of new physical pages from respectively one or more logical pages as well as the re-sorting of the pages, are determined in the second symbol field 14, "impose".

The possibility of processing the data stream resulting from "integrate" and "impose" on the physical page level exists with the third symbol field 15, "assemble". For example, the page layout can be post-processed therewith in that the positioning of the logical pages or images is modified, blank sheets are inserted or marks are placed on the sheets.

Each of the three symbol fields contains a plurality of command buttons that respectively open new windows for a more detailed definition of corresponding parameters.

Figure 3 shows the window that opens upon actuation of the command button 16, "merge", in the symbol field 15 (integrate).

This window is composed of three areas. The type of insertion, its position and the pages of the print data stream to be processed are indicated in the first area, "settings". What source is to brought into communication with the data stream is indicated in the second window, "selection". A list of the pages and parameters selected in this way can be seen in the third field. The modification of documents thereby ensues on the basis of the individual pages.

The flexibility of the overall system not only allows the joining of specific document pages but also allows other datafiles to be mixed (overlaid) into the print

10

15

20

25

30

data stream to be printed out. The corresponding settings are undertaken in the window shown in Figure 5. An overlay datafile can thereby be selected, as can the corresponding pages of the document to be printed out and wherein this overlay is to be overlaid.

As a result of such a mixing, both the original page as well as the page (information) determined by the overlay can be seen in the ultimate printed product.

Images of the print data stream can be cropped, i.e. specific areas in the pages of the print data stream can be cut out, via the control button, "cropping", or, respectively, via the selection window shown in Figure 4. Variable data, i.e. data from an external datafile (for example, address datafile), can be selectively linked into the print datafile in such cropped areas or into areas of the print datafiles that are already empty per se. The corresponding settings are undertaken by the window shown in Figure 6. For example, this functionality allows a personalized printing of printed matter in that, for example, an individual, personal dedication is printed on the first page of the printed matter, for example of each book.

The mask shown in Figure 7 is opened with the command button, "impose". Typical imposition parameters can be set in this window, for instance N-up (one-up, two-up with identical copies, etc.) and layout (tumble, work-and-turn, etc.). Further, various predefined standard imposition patterns can be selected and called. To that end, the format of the recording medium (A4, letter, etc.) in the printer is also selected or, respectively, indicated. When the option "identical copies" in the area "N-up" was selected, the size and the position of the copied fields can be set via the area 17 ("define objects..."). These printing parameters within a page can be optimized as a result thereof, for example when printing calling cards.

The signature division is defined via the command button, "signatures". This ensues in the window shown in Figure 8. The division of the total number of pages into sections (signatures) ensues via the register card, "sections". 20 sections are provided in the illustrated example, whereby the sections 17-20 each respectively comprise 24 pages. The smallest section (number 12) comprises only 12 pages. It is thus possible to freely select the respective scope of the sections with this functionality. On the one hand, this makes it possible to optimize the sections, i.e. the

signatures, to the effect that as few blank pages as possible are produced. On the other hand, smaller signatures — which are less stable than larger signatures in the bound condition — can be centrally placed in the printed matter, so that the overall work has maximum stability in the bound condition. The signature marks that are required for the later processing steps (folding, binding) can be defined with the second register card. "mark".

The input file (data stream) is divided according to the set signatures in the workflow. Large printed sheets that must be multiply folded in order to then form a chapter of the ultimate printed matter (book, periodicals) thereby arise corresponding to the signatures. It is standard that 4 through 96 logical pages be supported for the signatures, i.e. usually multiples of four logical pages, whereby there can also be a departure from both said rules in exceptional cases.

The window shown in Figure 9 is activated with the command button, "positioning", in the symbol field, "assemble. By way of exception, a sheet is referred to as "page" in this window. That the images of a page imposed on a sheet are to be printed centered can be optionally selected in this window. With this option, thus, it is possible to print the images, i.e. a printed paged, web-centered on a web-shaped recording medium, for example on paper. This option is particularly useful when the recording medium format specified in the print job does not exactly coincide with the format of the physical recording medium.

Figure 10 shows the input window with which the parameters for the initially described type area correction are defined given folded paper webs.

Parameters about the nature of the folding are queried in the query field 20. The version, "standard folding" is selected when sheets are only folded around a single edge. This, for example, is the case when a paper web is printed, the paper web is cut into individual sheets, the individual sheets are placed on top of one another and, finally, all sheets are folded over a common edge and stitched together. A type of processing with the same result would be that individual sheets (cut sheets) having a smaller format such as, for example, DIN A4 or DIN A3 are printed, are then likewise placed on top of one another and, finally, folded over the common middle edge and stitched. The option, "inside" or "outside", defines whether the original page

10

15

20

25

3.0

positioning on the inner sheet of the signature or on the outer sheet of the signature is preserved. This function is described in greater detail later in Figure 14.

Whereas the version, "standard folding", is only selected for sheets that are folded over a single edge, the version, "signature folding", is selected when folding is carried out over two axes residing perpendicularly on one another. This version will be discussed in detail later on the basis of Figure 15.

The specific weight of the paper (for example, 70 g/m²) is input with the query field 21, "paper weight". Inventively, a correction quantity with reference whereto the individual offset of the print image on the page or, respectively, the quantities required for the type area correction are calculated is determined from this parameter. Details about this calculation are described in greater detail in conjunction with Figures 14 through 17.

In addition to or instead of the paper weight, further parameters of recording media, for example the type of material (paper, film, cloth), the thickness of the recording material or the like, can be indicated in the window, "define creep", in an alternative exemplary embodiment. It can also be provided to allocate these particulars to a specific signature (for example, signature No.12 in Figure 8) and/or to undertake a corresponding allocation to one of several connected printer devices.

The input window for "blank sheets" shown in Figure 11 allows inputs with which blank sheets can be inserted at specific positions before or after printed sheets. In ongoing printing operations, this can particularly ensue with an arrangement that is disclosed by EP 741 877 B1 or, respectively, in WO-A-95/20185 corresponding thereto. An external charging (EB) with which, for example, colored or separating sheets pre-printed elsewhere can be inserted into the sheet stream printed by the PoD printer device before the different sheets of a document are joined and bound to form the document is also provided with the buffer memory shown thereat in Figure 1. The content of this earlier publication (EP '877) is incorporated by reference into the present specification.

Marks, for example cut marks, end-of-job marks or other, user-specific marks, can be applied to specific pages of the imposed print data with the input window indicated in Figure 12.

10

15

20

25

30

Paper input trays can be selected and a job offset function can be activated sheet-by-sheet with the input window shown in Figure 13. These selection functions are particularly relevant given output with single-sheet printer devices. The job offset function makes it possible to sort the individual sheets (signatures) by signatures or, respectively, jobs and to thus potentially support a compile function that implemented manually or by machine.

The command button, "print range", shown in Figure 2 makes it possible to define a print range and to print only a sub-region of the datafile as an alternative to a complete print datafile. This is especially advantageous for a proof. As a result thereof, critical sub-regions can be tested, for example the print out of individualized regions of the print job or the overlay of various pages.

Figure 14 shows a printed paper web on which, printed double-sided, a "two up" pattern is printed. The front side 6a of the paper web carries the page numbers 1, 4, 5, 8, 9, 12, 13 and 16, and the back side 6b of the paper web carries the page numbers 2, 3, 6, 7, 10, 11, 14 and 15. When it is assumed that a signature 25 is formed from these 16 pages in that the paper web is respectively cut to sheets at the cut edges 16, successive sheets are placed on top of one another and, finally, are folded around the common center fold 27, then the following condition must be met so that pages following one another lie on top of one another with exact registration, i.e. a registration correction is implemented given standard folding.

The logical printed pages with the numbers 1, 2, 15 and 16 of the outer sheet 28 of the signature 25 must be placed farthest outside on the paper web, whereas the logical pages -- the farther the sheets lie inside in the folded signature 25 -- must be positioned farther in toward the middle fold 27. The following thus applies mathematically:

$$a > b$$
.

whereby 'a' references the distance of the print image of the pages of the outer sheet from the center fold and 'b' references the distance of the print image of the pages of the inner sheet 29 from the center fold 27.

One effect of this type area correction (creep function) is that the outer edge 31 of the print image 24 increases [sic] from the lateral edge 30 of the paper web

10

15

25

6 from the outer sheet to the inner sheet. The shift of the print images thus ensues in the direction of the line [sic] 32 indicated in Figure 14. The parameters "inside" or, respectively, "outside" in the query field 20 (Figure 10) determine whether the original page positioning is to be preserved on the inner sheet 29 or on the outer sheet 28 of the signature 25. When the user decides in favor of the "inside" option, then the logical pages — proceeding from the inner sheet 29 -- migrate farther toward the outside opposite the arrow direction 32. When the "outside" option is selected, then the original position of the print image 24 on the outer sheet 28 is preserved, and the print images on all other sheets are shifted inward in arrow direction 32 toward the center fold 27.

For calculating the sheet-by-sheet print image offset, conclusions about the paper thickness are drawn from the parameters (specific paper weight) indicated in Figure 10, a step width is calculated for the print image shift per sheet, and an individual correction shift value is defined for each page of the sheet. The following algorithm (algorithm 1) is applied for this purpose:

```
if (inside)
    pweights_init = 0 - weight * sheet_ges - 1
else
    pweights_init = 0
```

o correction shift value = (pweights_init + weight * (lage - 1)) / a * lunits * (dpi / STD_MPI),

whereby the following apply:

a = an empirically determined parameter for a specific paper grade; for example, a factor a = 500 has proven beneficial for a standard paper with a specific weight of 80 g/m²,

sheets_ges = plurality of sheets
weight = paper weight in grams/m² (for example, weight = 80)

(if "inside" => negative operational sign, i.e.: -80)
lage = page position in the sheet, calculated according to algorithm 2

30 lunits = 1 unit/pel

10

15

20

dpi = current resolution, for example 600 pel/inch

STD MPI = 25.4 mm/inch.

Instead of specifying the specific weight and the correspondingly stored value of the quantity 'a', the paper thickness can be deposited in a table. A corresponding shift value is then determined for each sheet and the logical pages situated on the sheet. Instead of calculating the shift value, it is also possible to select or, respectively, input the shift value from the user. The sheet number or, respectively, the position of the page in the folded sheet is determined dependent on the page number. In the case of "standard folding", all sheets are folded around the center fold (27). The

determination of the parameter "lage" then ensues according to the following algorithm (algorithm 2):

```
if
    (page nr <= pages ges/2 and page nr even-numbered)
    then → lage = page nr/2
    else if
    (page_nr <= pages_ges/2 and page_nr odd-numbered)
            then \rightarrow lage = (page nr + 1)/2
    else if
    (page nr > pages ges and page nr even-numbered)
            then \rightarrow lage = (2 * pages ges/2 - page nr + 2) / 2
    else if
    (page nr > pages ges and page nr odd-numbered)
            then \rightarrow lage = (2 * pages ges/2 - page nr + 1) / 2,
whereby the following apply:
```

The position determined in this way is the multiplier in algorithm 1 for the correction shift value of the corresponding page.

Example for the calculation of the correction shift according to the two 30 algorithms that have been described:

Standard folding: "inside"

10

15

20

25

Paper weight (g/m²): 80 Signature and page distribution as in Figure 14

```
→ weight = -80

→ sheets_ges = 4

→ pweights_init = 0 - (-80 * (4 - 1)) = 240

→ correction shift = (240-80 * (lage -1)) / 500 * 600/25.4
```

```
lage = 1: correction shift value = 0.48 \text{ mm} (11 lunits)
lage = 2: correction shift value = 0.32 \text{ mm} (8 lunits)
lage = 3: correction shift value = 0.16 \text{ mm} (4 lunits)
lage = 4: correction shift value = 0.00 \text{ mm} (0 lunits)
```

Figure 15 shown an imposition pattern 35 for a signature printing wherein folds ensue in folding axes that are perpendicular to one another. The imposition pattern 35 comprises 32 logical pages, whereby the numbers of the pages that are printed on the front side of the paper web 6 are referenced without parentheses, and the number of the pages that are printed on the back side of the paper web are provided with parentheses. Page 1, thus, is printed on the front side, whereas page 2 is printed on the back side.

The signature or, respectively, the sheet allocated to this signature comprises 32 pages. The folding event ensues in a plurality of steps, whereby the result of the folding due to the reading sequence of the finished printed matter (page sequence 1, 2, 3, ...32) is already fixed in advance. It follows therefrom that the folding event is an event that can be unambiguously described. Given the example shown in Figure 15, the event can be subdivided into three sub-steps.

A zig-zag folding at the three fold edges 41, 42 and 43 ensues in the first sub-step. This procedure leads to the folded sheet 35. When this sheet 36 is folded over the folding axis 44, then the folded sheet 37 arises in the second sub-step. This is folded around the center fold axis 45 in the third sub-step and cut at the remaining axes, the signature 38 arising as a result thereof.

10

15

20

25

30

The folding events that have just been described can be described in the following way, logically abstracted:

In an n-dimensional space, let the logical page numbers be arranged corresponding to their positions on the recording medium and to the folded condition of the latter. When, for example, all pages of the paper web given a two-up printing are situated in a plane (level) corresponding to the situation during printing, then the space is four-dimensional corresponding to the front side or, respectively, the back side of the recording medium and a respective row and a column. The dimension is increased at least in regions with specific folding operations. For example, the dimension is doubled by a folding for all those positions that are folded onto one another.

It can be seen with reference to the example of Figure 15 that the space multiplies to a dimension 16 with the first sub-step, i.e. with the zig-zag fold. In the diagram 50, the logical page arrangement is correspondingly indicated with four levels E1, E2, E3 and E4 each having two pages (front side and back side), one respective row and one respective column. After the folding around the center axis 44, the level structure 51 then derives that has exactly twice the number of levels as the level structure 50, namely 8 levels each having two pages. Accordingly, the space to be described is 32-dimensional.

Such a logical level structure can be imaged without further ado in dataoriented terms by corresponding tables or variables with addresses (pointers). Accordingly, the physical folding of sheets can be simulated without further ado in data-oriented terms.

As shown in Figure 16, a fold-conditioned position shift of the printed pages within a signature can be replicated from the simulated folds and from the knowledge of the paper web thickness and, thus, can also be corrected. This position correction then ensues not only along one axis as in Figure 14 but also along a second fold axis that is perpendicular to the first axis. Whereas — as was already the case in Figure 14 — the print image shifts ensues [sic] along the arrows 32 corresponding to the folding relative to the center fold axis 45, additional print image shifts along arrow

10

15

20

25

3.0

34 and corresponding to the signature folding around the fold axis 44 that are perpendicular thereto are provided given the signature folding shown in Figure 16.

The algorithm with which the distribution of the pages, the structure of the sheet filled with pages can be constructed and the folding can be simulated step-by-step is described on the basis of Figures 17 and 18. What effect the respective folding has is then known from this simulation. A position correction of the printed pages can thus be implemented fold-by-fold.

The algorithm proceeds from the distribution of the pages on the paper web, which is known from the imposition sequence (i.e. the parameter set prescribed in the "impose" work step). Figures 17a and 17b show the initial condition of the unfolded sheet, whereby Figure 17a shows the physical sheet and Figure 17b shows the corresponding logical and computer-convertible fold model equipped with logical variables (front page, back page, level, row, column, up, down) or, respectively, pointers in the form of a list structure for the signature.

Proceeding from the condition shown in Figures 17a and 17b, which page pair should folded onto one another next is successively determined according to Figure 18a. In step S1, a counter n is pre-occupied with 2 and a counter m is pre-occupied with 3 for this purpose, corresponding to the second and third page. Subsequently, the sub-program, "Folding possible?", is started, see Figure 18b.

In step S13, the pages n and m are first sought therein in the two rows Row1 and Row2. Subsequently, three criteria are checked off in succession. A check is carried out in step S14 to see whether the two pages to be folded onto one another lie in the same row. If not, a finding is made next in step S18 as to whether the two pages n and m lie in the same column. When this is true, the program is ended, since the next fold is a matter of the signature fold (edge 44) around the second axis (residing perpendicular to all previous fold axes). Otherwise, a "no" output ensues (step S17); the two pages cannot be folded since they lie neither in the same row (step S17) nor in the same column (step S18).

When the query is step S14 os answered with yes, then the difference between the two column numbers of the pages n and m is formed next (step S15).

When the difference yields an odd-numbered value, one can continue with step S16;

10

15

20

25

3.0

otherwise, the output "no" ensues (step S17). Step S16 determines whether the pages n and m both lie on the lowest level or uppermost level in the folded signature as well as whether both pages are a front side or a back side. When this is the case, the pages can be folded onto one another in the current step and a "yes" output ensues (step S19). Otherwise, "no" is output (step S17).

When the return of the sub-program, "Folding possible?", into the main program (Figure 18a) ensues with the output "no", then a check is carried out there to see whether the current page pair also exists as an entry in the list of the page pairs that were noted in advance (step S3). When this is not the case, then the current page pair is entered at the end of the list or pre-noted page pairs, "prio_list" (step S10) and, in step S11, the page counter for both elements of the page pair (n,m) is incremented by an offset of 2. Otherwise, one continues with step S7.

When, in contrast, the return from the sub-program (Figure 18b) into the main program (Figure 18a) ensues with the parameter, "yes", then the folding of the page pair onto one another is simulated in the main program, and the signature list (Figure 17b) is updated (step S2). A new page pair for which a folding is to be attempted must be found in the following steps. To this end, a check is carried out to see whether entries are present in the list for pre-noted entries (step S4). When this is the case, then a further check is carried out to see whether or not the current page pair (n, m) is also already contained in this list (step S5). If yes, then this can be removed from the list (step S6) since it was capable of being successfully folded (in step S2). When the pair (n, m) is not contained in the prio_list, the first page pair in the list becomes the new, current page pair for which a folding is attempted (step S9). When the query in step S4 does not apply, then one continues with step 11.

When the pair (n, m) was an element of the prio_list (step S5, S6), then a determination as to whether is resided at the end of this list is made in step S7. If not, then the next page pair after (n, m) in the list becomes the new, current page pair (step S8). When, however, the query in step S7 is answered with yes, then the page counter for both elements of the page pair (n, m) is incremented by an offset of 2 in the step 11. A check must thereby always be carried out in step 12 to see whether the values for n and m already lie outside the signature (n > total number of pages - 2, m > total

10

15

20

25

30

number of pages - 1). The simulation program ends in this case; otherwise, a a folding is attempted anew for the new page pair (n, m).

Since the total number of pages on the sheet is known, attempts to fold are carried out until folding is no longer possible, i.e. either the sheet has been completely folded (folding around axis 44 has been reached) or the program determines that the pages are arranged such on the sheet that further folding is no longer possible. In this case, an error message is output.

The position in the folded sheet was calculated for each page. The shift correction for the signature folding for each individual page is calculated dependent on this position and on the paper thickness (derived from the paper weight, which was previously input).

Figure 19 again shows an overview of the data-oriented work sequence (workflow) of an inventive system according to Figure 1. The data (PS, PDF, ...) generated in a first network 9 (customer network), for example from the programs Microsoft Word (registered trademark of Microsoft, Inc.), Quark (registered trademark of Quark, Inc.) or Frame Maker (registered trademark of Adobe Systems, Inc.), are thereby supplied to a print job manager 51 (PJM) either still within the network 9 or already within a print environment network 8. This print job manager first generates print job-specific data and commands such as printer identification, job class, etc. Then, on the one hand, it sends control data (TIC) to a control program 52 (order distribution system ODS) and, on the other hand, send the print data (PS, PDF, ...) to a data converter 53, for example to the RIP 3 shown in Figure 1. Optionally, it can also send the print data to a data storage system 54 (print file manager PFM) that administers print datafiles of the most varied formats in a print file library 55 and that can send the datafiles as needed to an external archiving system 56, for example to what is referred to as a COLD system for storage on a CD-ROM.

The print data converted into a new data stream (IOCA) in the data converter are then supplied to the composer 57, in which the imposition pattern is defined and the other steps described in conjunction with Figures 2 through 18 for modifying the print data stream can be undertaken. The print data adapted in this way are then supplied to a print data spooler 58 that forms a queue and finally sends the

15

print data to the printer 59 (see the printer 6 of Figure 1). The order distribution system 52 controls the events in the modules 53, 57 and 58 in inter-system fashion.

Exemplary embodiments of the invention were described. It is thereby clear that arbitrary developments and modifications as well are possible. In addition to the parameters that have already been described for the implementation of the type area correction, for example, further influencing quantities (parameters) effected by post-processing devices such as folding equipment or binding equipment can be involved in the correction calculation. Such parameters can also be selectably predefined

The invention is particularly suited for being realized in a computer program (software). It can thus be distributed in the form of a computer program module, as a datafile on a data carrier such as a diskette or a CD-ROM or as a datafile via a data or, respectively, communication network. Such and comparable computer program products are incarnations of the invention. The inventive executive sequence can be applied in a computer, in a printer device or in a printing system with following processing devices. It is thereby clear that the computer on which the program runs can contain known technical devices such as input means (keyboard, mouse, touch screen), a microprocessor, a data and control bus, a display device (monitor, display) as well as a main memory, a hard disk storage and a network card.

List of Reference Characters

	1	PoD printing system	
	2	host computer	
	3	RIP processor	
5	4	print server	
	5	printer device	
	6	paper web	
	6a	front side of the printed paper web	
	6b	back side of the printed paper web	
10	7	post-processing device	
	8	control line	
	9	LAN/WAN	
	10	client	
	12	main window	
15	13	integrate symbol field	
	14	impose symbol field	
	15	assemble symbol field	
	16	merge command button	
	17	define objects region	
20	20	creep folding query field	
	21	paper weight query field	
	24	print image	
	25	signature	
	26	cut edges	
25	27	center fold	
	28	outer sheet	
	29	inner sheet	
	30	lateral edge of the paper web 6	
	31	outer edge of the print image 24	
30	32	directions of the print image shift	
	34	signature print image shift	

	35	signature imposition pattern
	36	first folded sheet
	37	second folded sheet
	38	signature
5	41	first fold axis
	42	second fold axis
	43	third fold axis
	44	fourth fold axis
	45	fifth fold axis
10	50	level structure
	51	print job manager
	52	order distribution system
	53	data converter
	54	print file manager
15	55	print file library
	56	archive
	57	composer
	58	spooler
	59	printer device
20	a=	spacing of the print image of the pages of the outer sheet 28 from the
		center fold 27
	b=	spacing of the print image of the page of the inner sheet 29 from the center
		fold

Claims

5

10

15

20

25

30

- Method for signature-by-signature editing of print data, whereby
 the print data are edited for printing on at least one sheet in a logical page sequence
 corresponding to at least one signature, whereby the signature forms a section of the
 printed product and contains a plurality of pages;
- at least one parameter of the recording medium (6) on which the print data are printed and that is relevant for the position of the print image on the recording medium (6) folded in signatures is defined:
- and whereby a position correction of the respective print image on the pages is implemented before the printing dependent on the parameter, whereby the folds of the sheet needed for producing the signature are computationally simulated with the assistance of a computer program, so that the print images of successive pages of the folded signature lie exactly registered above one another, whereby the folds ensue in two directions perpendicular to one another, and whereby the correction ensues in the two directions perpendicular to one another.
- 2. Method according to claim 1, whereby the folds of the signature (25) are computer-simulated for the position correction and the correction values for the print image of a page are calculated from the influence of each fold on the print image of at least this page.
- 3. Method according to claim 2, whereby the folds are simulated page-by-page with ascending or descending page number, whereby pairs of successive page numbers are respectively formed that, due to the signatures, come to lie on one another as a result of a fold and/or between which a fold is provided due to the signature.
- 4. Method according to claim 3, whereby a successive check is carried out to see whether a physical fold of the sheet is possible as a result whereof the pages of a page pair of successive pages are arranged in reading sequence after the sheet is folded to form the signature, whereby, when a fold is possible, a data-oriented fold is implemented and the page pair is entered in a list when a physical fold cannot be implemented.

15

20

- Method according to claim 4, whereby the page pairs present in the list are processed with priority over the other page pairs until a non-foldable page pair in the list is processed.
- 6. Method according to one of the preceding claims, whereby the thickness of the recording medium (6) is acquired as parameter.
 - Method according to one of the preceding claims, whereby all signatures (25) of the printed recording medium (6) that belong together are bound to form a print product.
 - 8. Printing system comprising at least one computer (2, 4, 10) and a printer device (5) for the implementation of a method according to one of the preceding claims.
 - 9. Printing system according to claim 8 having a least one post-processing device (7) that cuts, folds and/or binds a recording medium (5) printed by the printer device (5) to form a print product.
 - $10. \ \mbox{Printing system according to claim 9, whereby the binding ensues in signatures.}$
 - 11. Computer program product for the implementation of a method according to one of the claims 1 through 7.
 - 12. Computer program product according to claim 11, comprising a data carrier, a datafile, a computer program module or a command sequence and/or s signal sequence.
 - Computer on which a computer program product according to one of the claims 11 or 12 is loaded.

PCT WELTORGANISATION FÜR GEISTIGES EIGENTUM Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 7:		(11) Internationale Veröffentlichungsnummer:		WO 00/68877
G06K 15/00	A1	(43) Internationales Veröffentlichungsdatum; l	16. Novemb	er 2000 (16.11.00)

DE

(21) Internationales Aktenzeichen: PCT/EP00/04041

(22) Internationales Anmeldedatum: 5. Mai 2000 (05.05.00)

(30) Prioritätsdaten: 199 21 120.5 7. Mai 1999 (07.05.99)

(71) Anmelder (für alle Bestimmungsstaaten ausser US): OCE PRINTING SYSTEMS GMBH [DE/DE]; Siemensallee 2, 85586 Poing (DE).

(72) Erfinder; und

4000

'n

(75) Erfinder/Anmelder (nur für US): KOWALSKI, Jacek [DE/DE]; Evrystrasse 40, 53844 Troisdorf (DE). WEGELE, Petra [DE/DE]; Parkstrasse 4, 80339 München (DE).

(74) Anwälte: SCHAUMBURG, Karl-Heinz usw.; Postfach 86 07 48, D-81634 München (DE).

(81) Bestimmungsstaaten: CA, JP, US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht

Mit internationalem Recherchenbericht.

Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.

(54) Title: METHOD AND SYSTEM FOR IMPOSING PRINT DATA


(54) Bezeichnung: VERFAHREN UND SYSTEM ZUM AUSSCHIESSEN VON DRUCKDATEN

13 In Suppose Suppose


(57) Abstract

The invention relates to a method, a system and a computer programme for making an image area correction in a printing system; and are provided in a logical page order corresponding to at least one signature (25), for printing. At least one parameter of a recording medium (6) on which the print data are printed is determined, this parameter being relevant to the position of the printing format on the recording medium (6), which is folded according to the signature. The position of the pages is then corrected according to this parameter prior to printing, in such a way that the print formats of successive pages of the finished signature are distincted accordington the printing from the pr

1/14

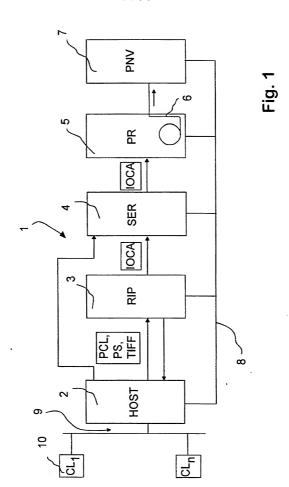

TODIOSED INFEDE

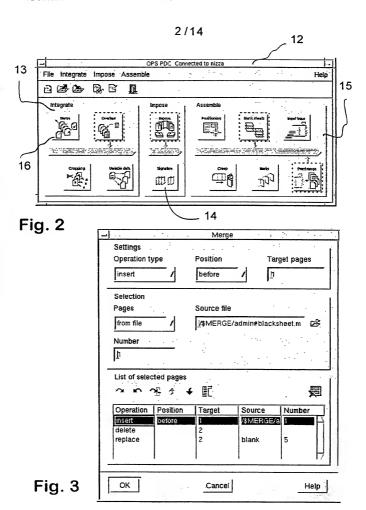

3 / 14




Fig. 4





Fig. 5

Fig. 6



	Impositioning
400	Define page layout and sequence
**	N-UP
- 1	Two Up
1	11mo ob
l".	Scheme Layout
18	
1.3	scheme 1 tumble
1	Dodin tower house that
20	Define target paper size
8	A4 / X 21.00 cm 7 29.70 cm 7
23	A CONTRACTOR OF THE SECTION OF THE S
-1:	Define objects on the page for identical Copy
113	Muniper In direction. × 日本
4,0	
33	Specing between x
1	origins in direction
	200 - 100 -
1	Cancel
- 1	Cancel

Fig. 7

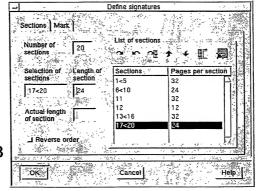


Fig. 8

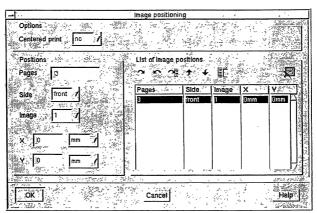


Fig. 9

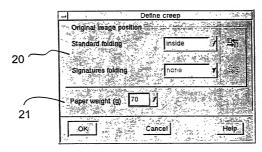


Fig. 10




Fig. 11

1 4

	, , , , , , , , , , , , , , , , , , , ,		· Define	marks	w .	1 (11	,20.,
Service Control	Marks Selection		Options of Extent	marks Positio	in Offse		1
The second	/\$MARKS/blacksheet [3	₹ <u>[0</u>			mm	
美 想	Pages 5		y <u>[0</u>	<u> [o</u>	[0	mm	
1	List of celected marks			Section 1			
12	Marks Pages	Extent/X	Extent/Y	Position/X	Position/Y	Offset/X	Offset/Y
	V-7-15-16-16-16-16-16-16-16-16-16-16-16-16-16-		Omm	Omm	Omm	<u>Omm</u>	
132	San	4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1.12			4216	*** * * * ****************************
1,500	OK]		Canc	eľ.			Help

Fig. 12

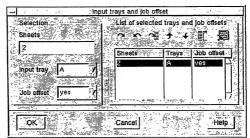
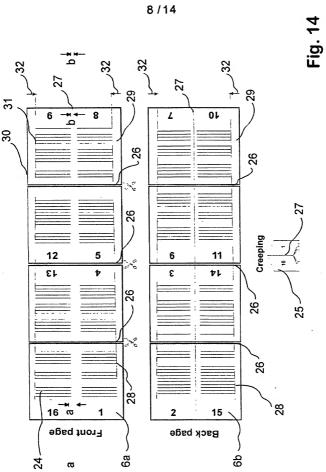


Fig. 13



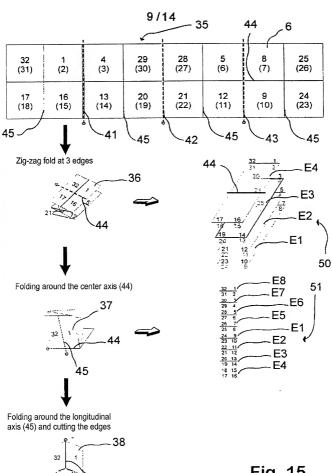
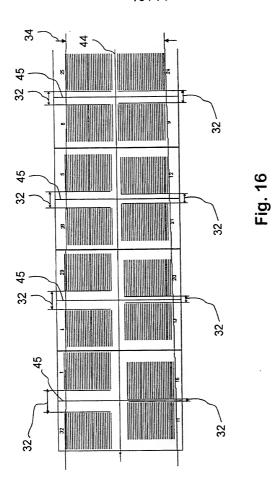


Fig. 15

10/14



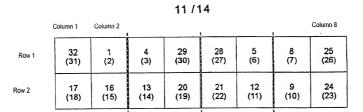


Fig. 17a

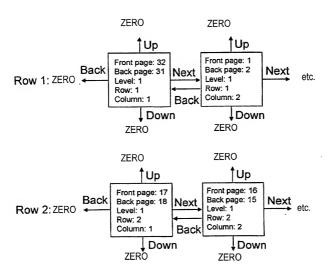
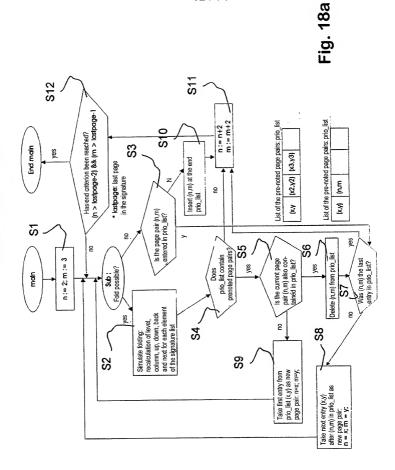


Fig. 17b

12/14




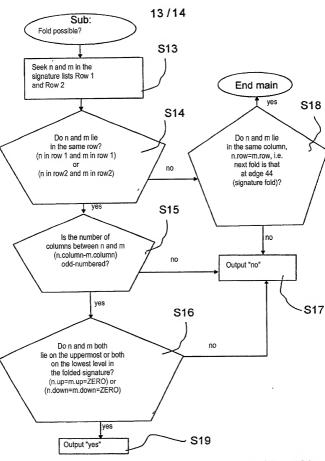


Fig. 18b

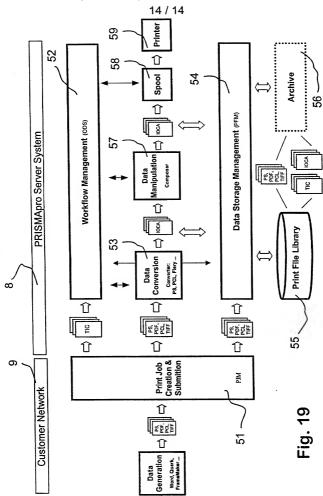

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION ERKLÄRUNG FÜR PATENTANMELDUNGEN MIT VOLLMACHT German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für des dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung nit dem Titel:

La de la companya de

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind an

durchgesehen und verstanden habe, die eventuell

durch einen Zusatzantrag wie oben erwähnt

abgeändert wurde.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivliprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsammeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird. As'a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND SYSTEM FOR IMPOSING PRINT DATA

the specification of which

(check one)

□ is attached hereto

☑ was filed on _05 May 2000
as United States application Number or PCT international application Number PCT/EP00/04041

and was amended on

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, \$1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

German Language Declaration

		· · · · · · · · · · · · · · · · · · ·	200.01.01.			
Prior foreign applications Priorität beansprucht			Priority Claimed			
199 21 120.5 (Number) (Nummer)	Germany (Country) (Land)	_07 May 1999 (Day Month Year Filed) (Tag Monat Jahr eingereicht)	ʻ ⊠ - Yes Ja	□ No Nein		
(Number) (Nummer)	(Country) (Land)	(Day Month Year Filed) (Tag Monat Jahr eingereicht)	□ Yes Ja	□ No Nein		
(Number) (Nummer)	(Country) (Land)	(Day Month Year Filed) (Tag Monat Jahr eingereicht)	□ Yes Ja	□ No Nein		
Zivilprozesson Paragraph 12C Anmeldungen Anspruch dies amerikanische Paragraphen d Ger Vereinigter erkenne ich g Paragraph 1.56 Informationen Ger früheren Ar	rdnung der h, den Vorzug: und falls der er Anmeldung n Patentanmel es Absatzes 36 n Staaten, Para emäss Absatz 5(a) meine Pflican, die zwisch mmeldung und de Anmeldedatu	emäss Absatz 35 der Vereinigten Staaten, aller unten aufgeführten Gegenstand aus jedem nicht in einer früheren idung laut dem ersten 5 der Zivilprozeßordnung graph 122 offenbart ist, 37, Bundesgesetzbuch, cht zur Offenbartung von ten dem Anmeldedatum iem nationalen oder PCT um dieser Anmeldung	Code. §120 of any Uni below and, insofar as the claims of this application United States application §122 I acknowledge information as defined Regulations, §1.56(a)	fit under Title 35, United States ted States application(s) listed es subject matter of each of the on is not disclosed in the prio in the manner provided by Title 35, United States Code the duty to disclose materia in Title 37, Code of Federa which occurred between the application and the national o date of this application.		
(Application Se (Anmeldeserie		(Filing Date) (Anmeldedatum)	(Status) (patentiert, anhängig, aufgegeben)	(Status) (patented, pending, abandoned)		
			(Status)	(Status)		

Ich erkläre hiermit, dass alle von mir in der vorliegenden Eklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnum der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentammeldung oder eines darauf erteilten Patentes gefährden können.

(Application Serial No.) (Anmeldeseriennummer) (Filing Date)

(Anmeldedatum)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(patented, pending,

abandoned)

(patentiert, anhängig,

aufgegeben)

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwait (oder die nachstehend benannten Patentanwätte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentameldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

Telefongespräche bitte richten an:

**Name und Telefonnummer)

Postanschrift:

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Direct Telephone Calls to: (name and telephone number)

312/258-5500 Patent Department

And I hereby appoint all Attorneys Identified by United States Patent & Trademark Office customer Number 26574, who are all members of the firm of Schiff Hardin and Waite.

Telephone 312/-258-5500 Patent Department

my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office

Send Correspondence to: SCHIFF, HARDIN & WAITE Patent Department

	6600 Sears Tower, Chicago, Illinois 60606-6473 Customer Number 26574				
	Voller Name des einzigen oder ursprünglichen Erfinders:		Full name of sole or first inventor: _JACEK KOWALSKI		
	Unterschrift des Erfinders	Datum	Inventor's signature, / Date / ACOWALSUM NO-11.01		
	Wohnsitz		Residence Troisdorf,Germany		
	Staatsangehörigkeit		Citizenship Germany		
	Postanschrift		Post Office Address Evrystrasse 40		
			D53844 Troisdorf Germany		

Page 3 of 4

Voller Name des zweiten Miterfinders (falls zuttreffend):	Full name of second joint inventor, if any: PETRA WEGELE
Unterschrift des Erfinders Datum	Inventor's signature Date PMAMM 12,11.01
Wohnsitz 3 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Residence B80339 Mucnohen, Germany 85586 Porng
Staatsangehörigkeit	Citizenship Germany
Postanschrift	Post Office Address Parkstrasse 4 D80339 Muenchen, Germany 5586 Win
Voller Name des dritten Miterfinders (falls zuttreffend):	Full name of third joint inventor, if any:
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address
Voller Name des vierten Miterfinders (falls zuttreffend):	Full name of fourth joint inventor, if any:
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address

(Bitte entsprechende Informationen und Unterschriften im Falle von zweiten und weiteren Miterfindern angeben).

(Supply similar information and signature for second and subsequent joint inventors).